



PART NO.	A22052-001	REV	ECO	DATE	APP
		D	100726	07-17-14	TLM

MATERIALS & SPECIFICATIONS

- INSULATOR:
LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138
- ORGANIZER BLOCK:
LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138
- CONTACT:
BERYLLIUM COPPER PER ASTM B194, C17200, GOLD PLATED PER ASTM B488 (HARD GOLD) TYPE II CODE C CLASS 1.27
- TERMINATION:
SOLDER COATED WITH SN63A PER J-STD-006 OR AMS-P-81728
- CURRENT CAPACITY:
3 AMP MAX PER MIL-DTL-83513
- CONTACT RESISTANCE:
26 MILLIOHMS (65 mV) MAX @ 2.5 AMPS PER MIL-DTL-83513
- PERFORMANCE:
PRODUCT FAMILY TESTED TO AND PASSED THE PERFORMANCE SPECIFICATIONS OF TABLE VII OF MIL-DTL-83513



ACTUAL SIZE

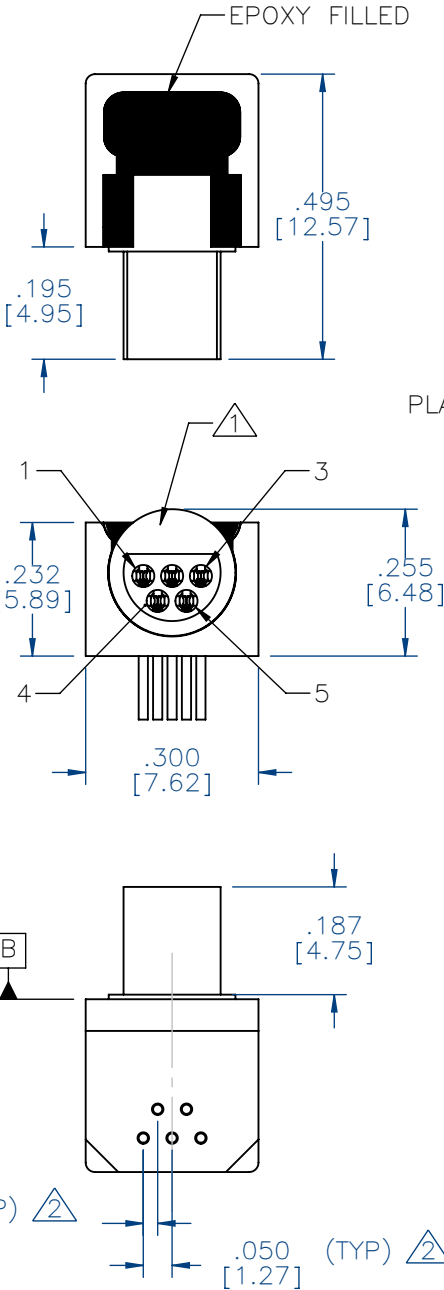

- NOTES:
- 1 MATING FACE OF CONNECTOR TO BE FREE OF EPOXY
- 2 TAIL DIMENSIONS APPLY AT PLANE A

DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

MCP	THIRD ANGLE	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.				CAGE CODE 61873
	-TOLERANCES- UNLESS OTHERWISE NOTED DIMENSIONS IN INCHES	DFTM. DNB	DATE 01-28-10	TITLE: (5) PIN MALE MICRO CIRCULAR RA CONNECTOR	OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	
SLDW	2 PL DEC± .01 3 PL DEC± .005 4 PL DEC± .0005 ANGLES ± 1°	CHK'D.	DATE			DWG NO. A22052-001
		APP'D.	DATE			SHEET 1 OF 1 SCALE: 3:1
						REV D