
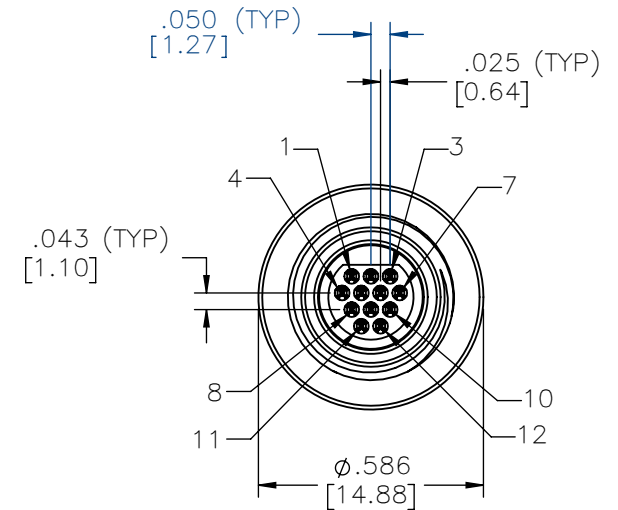


PART NO.	A22376-001	REV	ECO	DATE	APP
		A	101302	02-17-15	TLM

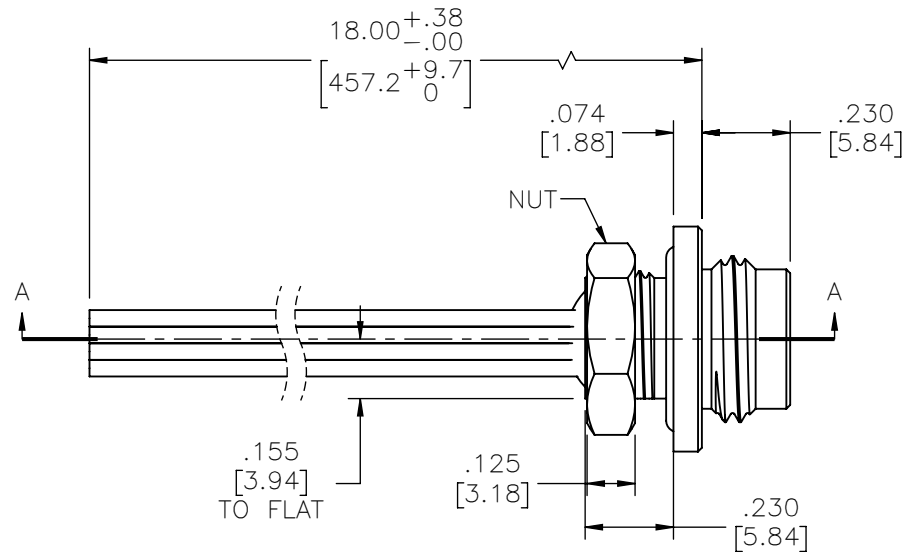

26 AWG (7-34)
PTFE, COLOR CODED

O-RING


M11 X 1

SECTION A-A
LESS NUT

M9 X 0.75

INTERNAL USE ONLY
USE MFG LOADING
PROCEDURE MC-12P

PIN #	COLOR
1	BLACK
2	BROWN
3	RED
4	ORANGE
5	YELLOW
6	GREEN
7	BLUE
8	VIOLET
9	GRAY
10	WHITE
11	WHT/BLK
12	WHT/BRN



ACTUAL SIZE
EXCLUDING WIRE LENGTH

NOTE:

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

THIRD ANGLE	TOLERANCES
UNLESS OTHERWISE NOTED	
DIMENSIONS IN INCHES	
2 PL DEC $\pm .01$	
3 PL DEC $\pm .005$	
4 PL DEC $\pm .0005$	
ANGLES $\pm ^\circ$	

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.	DATE 02-12-15	TITLE: (12) PIN MALE MICRO PROTRUDING PANEL MOUNT CIRCULAR CONNECTOR
DFTM. TLM	DATE	
CHK'D.	DATE	
APP'D.	DATE	

OMNETICS
CONNECTOR CORPORATION
7260 COMMERCE CIRCLE EAST
MINNEAPOLIS, MN 55432
WWW.OMNETICS.COM

CAGE CODE 61873	REV A
DWG NO. A22376-001	
SHEET 1 OF 2	
SCALE: 2:1	

PART NO.	A22376-001	REV	ECO	DATE	APP
		A	101302	02-17-15	TLM

MATERIALS & SPECIFICATIONS

INSULATOR
THERMOPLASTIC PER MIL-M-24519

CONTACT MATERIAL
PINS - BERYLLIUM COPPER PER ASTM B194, ALLOY C17200

CONTACT FINISH
GOLD PLATE PER ASTM B488, TYPE II (HARD GOLD), CODE C,
CLASS 1.27 (.000050)

WIRE
26 AWG (7-34) TYPE E PER NEMA HP3, COLOR CODED

SHELL & NUT
BRASS ALLOY 360, 1/2 HARD

SHELL & NUT FINISH
ELECTROLESS NICKEL PER SAE-AMS-2404

O-RING
BUNA-N

CURRENT RATING
3 AMPS PER MIL-DTL-83513

CONTACT RESISTANCE
26 MILLIOHM MAX (65mV DROP MAX) @ 2.5 AMPS PER
MIL-DTL-83513

PERFORMANCE
PRODUCT FAMILY TESTED TO AND PASSED THE PERFORMANCE
SPECIFICATIONS OF TABLE VII OF MIL-DTL-83513

MMCP SLDW	THIRD ANGLE 	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.			OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	-TOLERANCES- UNLESS OTHERWISE NOTED					DWG NO. A22376-001	
	DIMENSIONS IN INCHES	DFTM. TLM	DATE 02-12-15	TITLE: (12) PIN MALE MICRO PROTRUDING PANEL MOUNT CIRCULAR CONNECTOR		SHEET 2 OF 2	REV
	2 PL DEC ± .01	CHK'D.	DATE			SCALE: 2:1	A
	3 PL DEC ± .005	APP'D.	DATE				
	4 PL DEC ± .0005						
	ANGLES ± °						