

ECO

REV

APP

TLM

DATE

103735 08-24-17

I ATCHING:

MAKE SURE CONNECTORS ARE FULLY ENGAGED

FORCE CLIP EVENLY OVER CONNECTOR ASSEMBLY

ENSURE THE INSIDE SHOULDERS OF THE CLIP COMPLETELY SURROUND THE CONNECTORS AS SHOWN ABOVE

ENSURE CLIP CANNOT SLIDE AXIALLY ALONG THE CONNECTORS AND CONNECTORS ARE HELD IN PLACE BY THE INSIDE SHOULDERS OF THE CLIP

THIRD ANGLE 4

-TOLERANCES-

UNLATCHING:


PART NO.


PROTRUDING TAB ON ONE END OF CLIP IS USED TO LEVERAGE THE CLIP OFF OF THE CONNECTORS

SECURE OTHER SIDE OF CLIP WITH ONE FINGER AS TAB IS LIFTED AWAY FROM CONNECTORS

CLIP WILL SNAP OFF WHEN ROTATED AWAY FROM CONNECTOR ASSEMBLY AS SHOWN BELOW

A22525-005



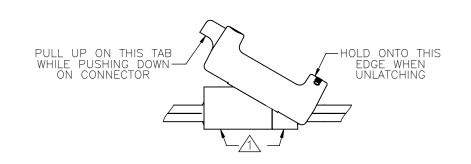

NOTES:

WIRED CONNECTORS SOLD SEPARATELY (CONTACT SALES REPRESENTATIVE FOR MORE INFORMATION)

DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

LATCHING AND UNLATCHING INSTRUCTIONS

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF

U.S. PATENT 9,088,103

ACTUAL SIZE

OMNETICS CONNECTOR CORP THIS DOCUMENT MAY NOT IN WHOLE OR IN PART BE DUPLICATED OR

CTOR CORPORATION A22525-0057260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432

WWW.OMNÉTICS.COM

CAGE CODE 61873

SHEET 1 OF 1 REV В SCALE: 2:1

	UNLESS OTHERWISE NOTED	DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.			
	DIMENSIONS IN INCHES 2 PL DEC± .01 3 PL DEC± .005 4 PL DEC± .0005 ANGLES ± 1°	DFTM. ERB	05-06-16	TITLE:	OSITION
C		CHK'D.	DATE		O CIRCULAR
1		APP'D.	DATE	LATO	CHING CLIP