

LATCHING:

MAKE SURE CONNECTORS ARE FULLY ENGAGED

FORCE CLIP EVENLY OVER CONNECTOR ASSEMBLY

ENSURE THE INSIDE SHOULDERS OF THE CLIP COMPLETELY SURROUND THE CONNECTORS AS SHOWN ABOVE


ENSURE CLIP CANNOT SLIDE AXIALLY ALONG THE CONNECTORS AND CONNECTORS ARE HELD IN PLACE BY THE INSIDE SHOULDERS OF THE CLIP


UNI ATCHING:

PROTRUDING TAB ON ONE END OF CLIP IS USED TO LEVERAGE THE CLIP OFF OF THE CONNECTORS

SECURE OTHER SIDE OF CLIP WITH ONE FINGER AS TAB IS LIFTED AWAY FROM CONNECTORS

CLIP WILL SNAP OFF WHEN ROTATED AWAY FROM CONNECTOR ASSEMBLY AS SHOWN BELOW



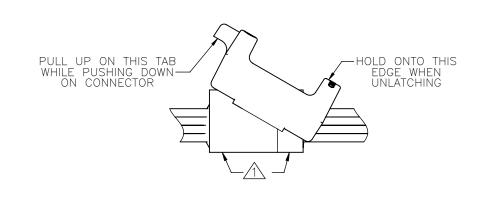

NOTES:

WIRED CONNECTORS SOLD SEPARATELY (CONTACT SALES REPRESENTATIVE FOR MORE INFORMATION)

DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

LATCHING AND UNLATCHING INSTRUCTIONS

APP'D.

U.S. PATENT 9,088,103

ACTUAL SIZE

THIRD ANGLE 🔷 🗗 THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF -TOLERANCES-OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT IN WHOLE OR IN PART BE DUPLICATED. OF DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP UNLESS OTHERWISE NOTED DFTM. ERB 05-06-16 TITLE: 2 PL DEC± .01 3 PL DEC± .005 4 PL DEC± .0005 ANGLES ± 1° 16 POSITION CHK'D. MICRO CIRCULAR

LATCHING CLIP

7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNÉTICS.COM

CAGE CODE 61873 CORPORATION A22525-016

SHEET 1 OF 1 REV В SCALE: 2:1