

PART NO.	A24001-002	REV	ECO	DATE	APP
		E	102048	11-03-15	TLM

POLYPHENYLENE SULFIDE (PPS)
PER MIL-M-24519, TYPE GST
40F.



BERYLLIUM COPPER PER ASTM
B194, C17200. GOLD PLATED
PER ASTM B488, (HARD GOLD)
TYPE II CODE C CLASS 1.27.

SOLDER COATED WITH SN63A PER
J-STD-006 OR AMS-P-81728.



BERYLLIUM COPPER PER ASTM
B194 NICKEL PLATE PER SAE-
AMS-2404.

3 AMP MAX.

26 MILLIOHMS (65mV) MAX @
2.5 AMPS.



PRODUCT FAMILY TESTED TO AND PASSED THE PERFORMANCE SPECIFICATIONS OF TABLE VII OF MIL-DTL-83513.

ACTUAL SIZE

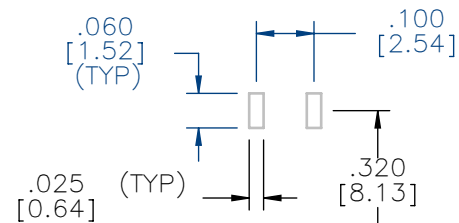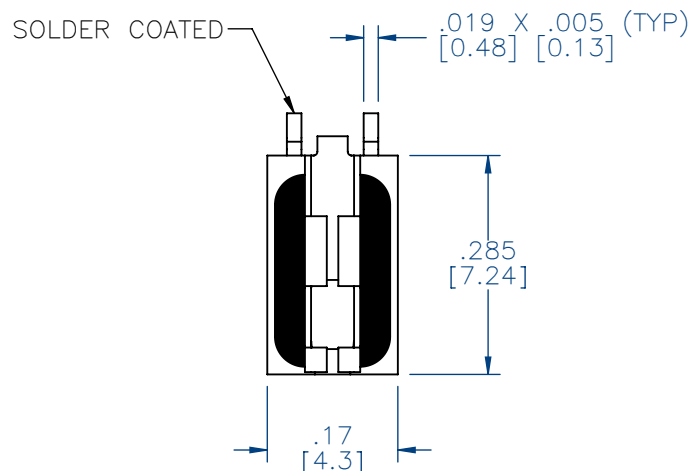

CONNECTOR FACE

SUGGESTED PAD LAYOUT

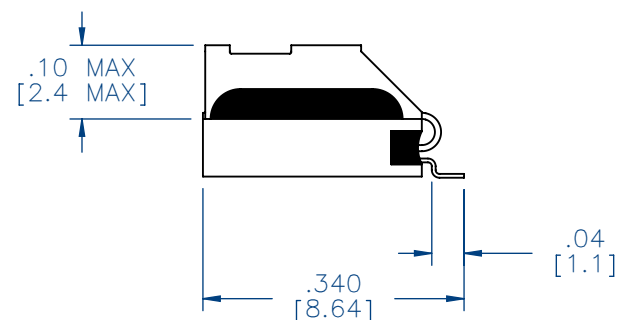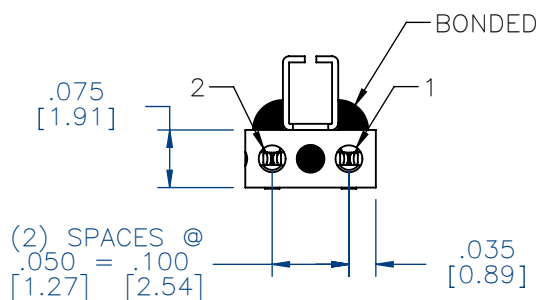

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

PS1	THIRD ANGLE 		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		 OMNETICS CONNECTOR CORPORATION 7260 CONNEAPOR CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	-TOLERANCES-					DWG NO. A24001-002	
	UNLESS OTHERWISE NOTED					SHEET 1 OF 1	
	DIMENSIONS IN INCHES					REV E	
2	PL DEC ± .01	DFTM. DEL	DATE 09-26-02	TITLE: (2) PIN MALE CONNECTOR W/LATCH		SCALE: 4:1	
3	PL DEC ± .005	CHK'D.	DATE				
4	PL DEC ± .0005	APP'D.	DATE				
SLDW	ANGLES ± 1°						