


PERFORMANCE:
PRODUCT FAMILY TESTED TO
AND PASSED THE
PERFORMANCE
SPECIFICATIONS OF TABLE
VIII OF MIL-DTL-32139.

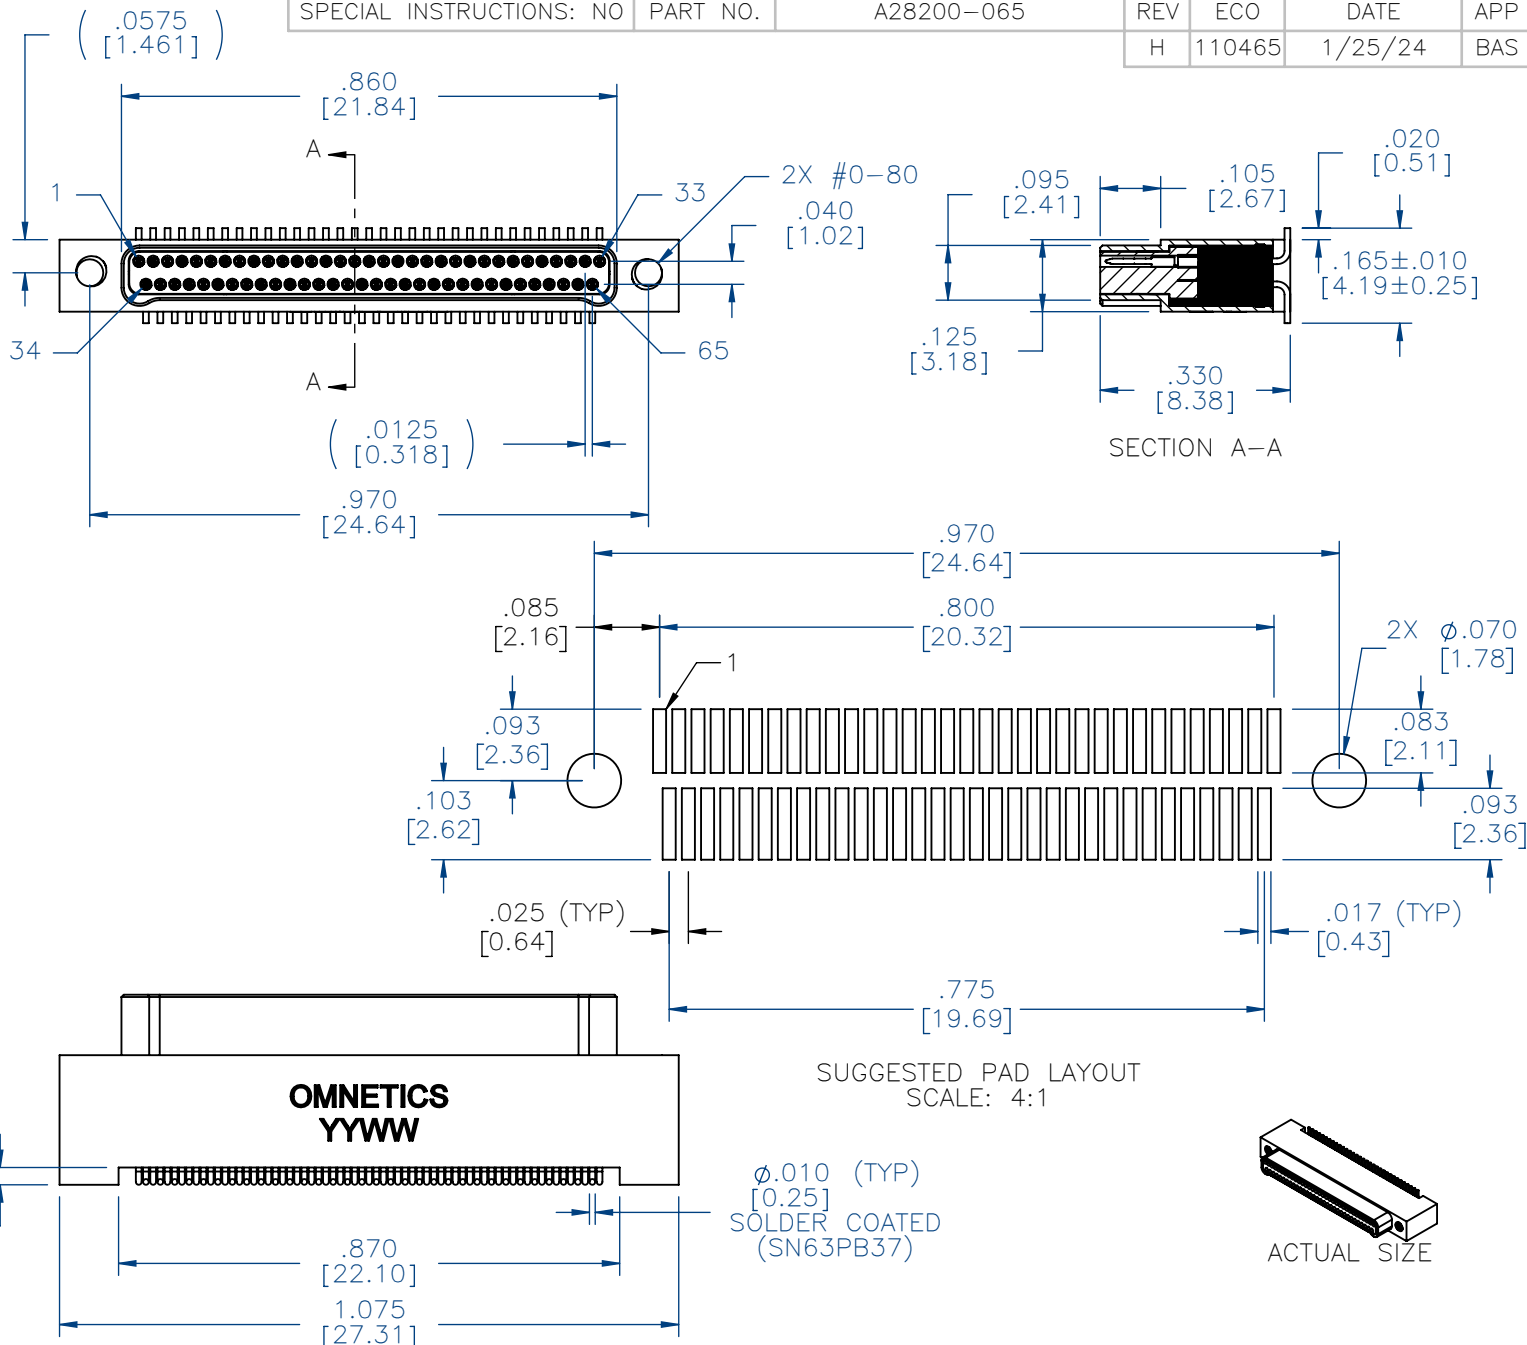

1. DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

MNP	THIRD ANGLE 	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.	
	—TOLERANCES— UNLESS OTHERWISE NOTED		
PO	DIMENSIONS IN INCHES	TITLE:	(65) PIN MALE
SLDW	2 PL DEC ± .01	DFTM. AAS	Bi-Lobe® CONNECTOR
	3 PL DEC ± .005 4 PL DEC ± .0005 ANGLES ± 1°	DATE 05-05-04	-

OMNETICS
CONNECTOR CORPORATION
8840 EVERGREEN BLVD.
MINNEAPOLIS, MN 55433
WWW.OMNETICS.COM

DWG NO.	CAGE CODE	61873
A28200-065		
SHEET 1 OF 1	SCALE: 3:1	REV H