

MATERIALS & SPECIFICATIONS

INSULATOR:

THERMOPLASTIC PER
MIL-M-24519, TYPE
GLCP-30F OR GST-
40F NATURAL

CONTACT:

BERYLLIUM COPPER
PER ASTM B194,
C17200. GOLD PLATED
PER ASTM B488,
(HARD GOLD) TYPE II
CODE C CLASS 1.27

TERMINATION:





SOLDER COATED PER
J-STD-006 OR PLATED
PER AMS-P-81728

CURRENT CAPACITY:

1 AMP MAX PER MIL-
DTL-32139

CONTACT RESISTANCE:

71 MILLIOHMS (71mV)
MAX @ 1.0 AMPS PER
MIL-DTL-32139

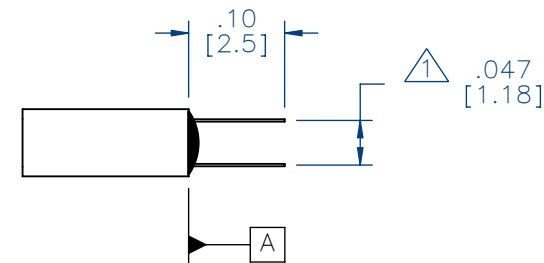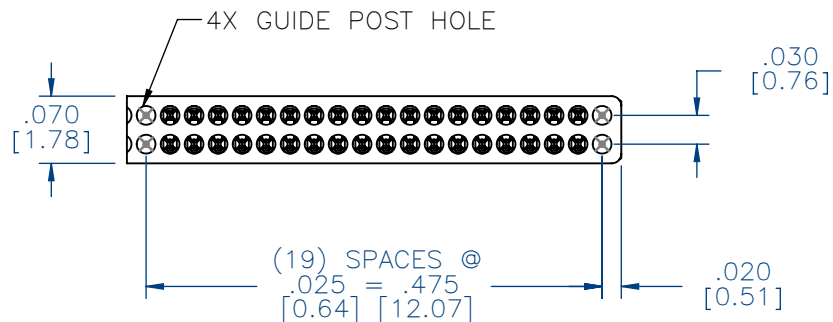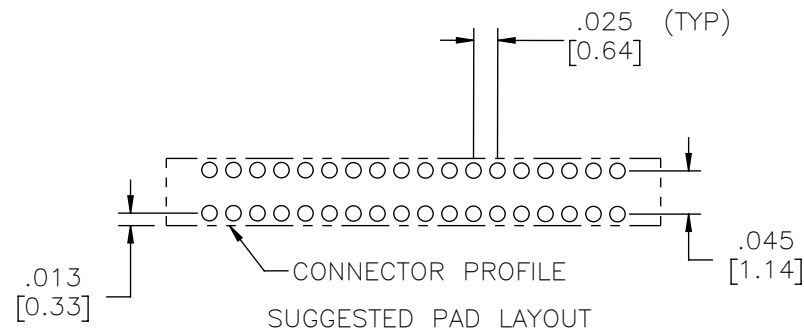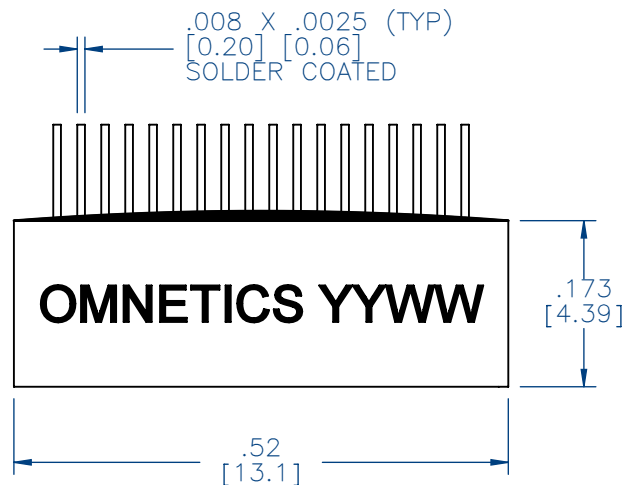

ACTUAL SIZE

1 TAIL DIMENSIONS APPLY AT PLANE A

NOTE:

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

NPD	THIRD ANGLE	
	-TOLERANCES-	
SLDW	UNLESS OTHERWISE NOTED	
	DIMENSIONS IN INCHES	
	2	PL DEC $\pm .01$
	3	PL DEC $\pm .005$
	4	PL DEC $\pm .0005$
	ANGLES $\pm 1^\circ$	

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.	
DFTM. TLM	DATE 09-18-08
CHK'D.	DATE
APP'D.	DATE

TITLE:
(36) PIN MALE NANO
DUAL ROW CONNECTOR
W/GUIDE POST HOLES

OMNETICS
CONNECTOR CORPORATION
7260 COMMERCE CIRCLE EAST
MINNEAPOLIS, MN 55432
WWW.OMNETICS.COM

CAGE CODE 61873	
DWG NO. A79022-001	
SHEET 1 OF 1	REV D
SCALE: 5:1	