

MATERIALS & SPECIFICATIONS

INSULATOR MATERIAL:
THERMOPLASTIC POLYMER PER MIL-DTL-32139


CONTACT MATERIAL:
COPPER ALLOY PER MIL-DTL-32139. GOLD PLATED PER ASTM B488, (HARD GOLD) TYPE II CODE C CLASS 1.27

TERMINATION:
GOLD PLATED PER ASTM B488, (HARD GOLD) TYPE II CODE C CLASS 1.27


CURRENT CAPACITY:
1 AMP MAX PER MIL-DTL-32139

CONTACT RESISTANCE:
71 MILLIOHMS (71 mV) MAX @ 1.0 AMPS PER MIL-DTL-32139



PART NO.	A79113-001	REV	ECO	DATE	APP
		D	98556	05-18-12	TLM

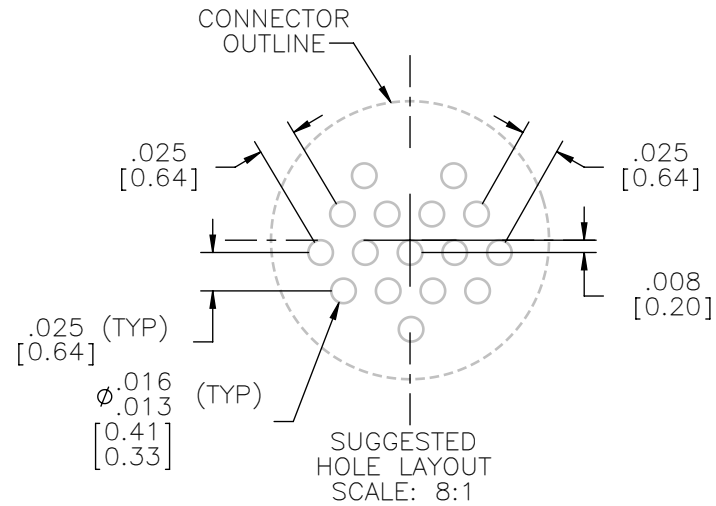

ACTUAL SIZE

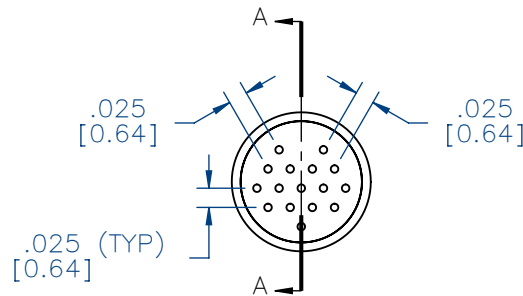

LOADING VIEW
LESS EPOXY

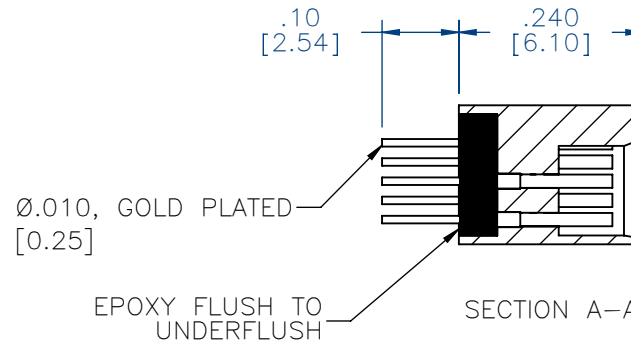

RoHS

NCS	THIRD ANGLE 		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		 CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	—TOLERANCES— UNLESS OTHERWISE NOTED					DWG NO. A79113-001	
SLDW	DIMENSIONS IN INCHES		DFTM. ACM	DATE 01-22-09	TITLE: (16) SOCKET FEMALE NANO CIRCULAR CONNECTOR	SHEET 1 OF 1	REV D
	2 PL DEC± .01			DATE			
	3 PL DEC± .005		CHK'D.				
	4 PL DEC± .0005			DATE			
	ANGLES ± 1°		APP'D.				