



PART NO. A79124-016 APP REV ECO DATE 08-24-17 103735 TLM









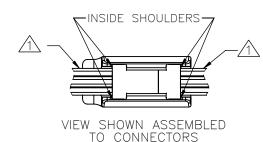

I ATCHING:

MAKE SURE CONNECTORS ARE FULLY ENGAGED

FORCE CLIP EVENLY OVER CONNECTOR ASSEMBLY

ENSURE THE INSIDE SHOULDERS OF THE CLIP COMPLETELY SURROUND THE CONNECTORS AS SHOWN ABOVE


ENSURE CLIP CANNOT SLIDE AXIALLY ALONG THE CONNECTORS AND CONNECTORS ARE HELD IN PLACE BY THE INSIDE SHOULDERS OF THE CLIP


UNI ATCHING:

PROTRUDING TAB ON ONE END OF CLIP IS USED TO LEVERAGE THE CLIP OFF OF THE CONNECTORS

SECURE OTHER SIDE OF CLIP WITH ONE FINGER AS TAB IS LIFTED AWAY FROM CONNECTOR

CLIP WILL SNAP OFF WHEN ROTATED AWAY FROM CONNECTOR ASSEMBLY AS SHOWN BELOW



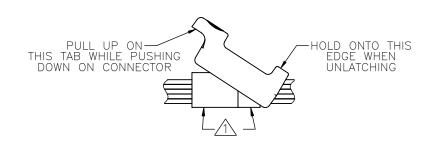

NOTES:

WIRED CONNECTORS SOLD SEPARATELY (CONTACT SALES REPRESENTATIVE FOR MORE INFORMATION)

LATCHING AND UNLATCHING INSTRUCTIONS

U.S. PATENT 9,088,103

ACTUAL SIZE

DIMENSIONS	IN []	ARE	IN
MILLIMETERS	UNLE	SS	
OTHERWISE I	NOTED	Δ ND	ΔRF

FOR REFERENCE ONLY

I	THIRD ANGLE⊕⊖	THIS DRAWING CONTAIN	S CONFIDENTIAL AND	PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF		
ĺ	-TOLERANCES-	OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.				
ı	UNLESS OTHERWISE NOTED					
ł	ONLESS OTHERWISE NOTES	DFTM. BCV	DATE	TITI F.		
ı	DIMENSIONS IN INCHES	LIDETM BCV	06 16 16			
	2 PL DEC± .01	B1 11111 B01		16 POSITION		
١l	Z L DEC : .01	0.11.25	DATE			
4	3 PL DEC005	CHK'D		NANO CIRCULAR		
J	4 PL DEC± .0005	01111 01		TVIIVO CIRCOLIIR		
4	T I L DLC : .0000	4 D D ' D	DATE	LATCHING CLIP		
d	ANGLES ± 1°	APP'D.		LATCHING CLIF		

CORPORATION A79124-016 7260 COMMERCE CIRCLE EAS MINNEAPOLIS, MN 55432 WWW.OMNÉTICS.COM

CAGE CODE **61873** DWG NO.

IA	A13124			010	
Τ	SHEET	1	OF	1	REV
	SCAL	E:	2:1		В