

LATCHING:

MAKE SURE CONNECTORS ARE FULLY ENGAGED

SLIP WIRES FROM EITHER END OF CONNECTOR THROUGH RETENTION LOOP ON CLIP AND CENTER THE CLIP OVER THE MATED CONNECTORS

FORCE CLIP EVENLY OVER CONNECTOR ASSEMBLY

ENSURE THE INSIDE SHOULDERS OF THE CLIP COMPLETELY SURROUND THE CONNECTORS AS SHOWN ABOVE


ENSURE CLIP CANNOT SLIDE AXIALLY ALONG THE CONNECTORS AND CONNECTORS ARE HELD IN PLACE BY THE INSIDE SHOULDERS OF THE CLIP


UNLATCHING:

PROTRUDING TAB ON ONE END OF CLIP IS USED TO LEVERAGE THE CLIP OFF OF THE CONNECTORS

SECURE OTHER SIDE OF CLIP WITH ONE FINGER AS TAB IS LIFTED AWAY FROM CONNECTOR

CLIP WILL SNAP OFF WHEN ROTATED AWAY FROM CONNECTOR ASSEMBLY AS SHOWN BELOW

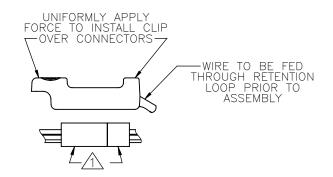

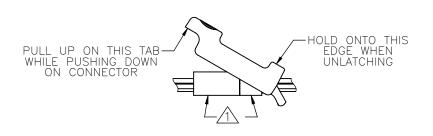

NOTES:

WIRED CONNECTORS SOLD SEPARATELY (CONTACT SALES REPRESENTATIVE FOR MORE INFORMATION)

DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

LATCHING AND UNLATCHING INSTRUCTIONS

U.S. PATENT 9,088,103

ACTUAL SIZE

CAGE CODE 61873

7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNÉTICS.COM

corporation A79125-006

SHEET 1 OF 1 REV В SCALE: 2:1

	THIRD ANGLE⊕⊖	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF
	-TOLERANCES-	OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OF DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.
	UNLESS OTHERWISE NOTED	
	DIMENSIONS IN INCHES	DFTM. ERB 06-20-16 TITLE:
_	2 PL DEC+ .01	
0	3 PL DEC± .005	CHK'D. DATE NANO CIRCULAR

4 PL DEC± .0005 ANGLES ± 1° LATCHING CLIP APP'D.