

### LATCHING:

MAKE SURE CONNECTORS ARE FULLY ENGAGED

SLIP WIRES FROM EITHER END OF CONNECTOR THROUGH RETENTION LOOP ON CLIP AND CENTER THE CLIP OVER THE MATED CONNECTORS

FORCE CLIP EVENLY OVER CONNECTOR ASSEMBLY

ENSURE THE INSIDE SHOULDERS OF THE CLIP COMPLETELY SURROUND THE CONNECTORS AS SHOWN ABOVE


ENSURE CLIP CANNOT SLIDE AXIALLY ALONG THE CONNECTORS AND CONNECTORS ARE HELD IN PLACE BY THE INSIDE SHOULDERS OF THE CLIP


## **UNI ATCHING:**

PROTRUDING TAB ON ONE END OF CLIP IS USED TO LEVERAGE THE CLIP OFF OF THE CONNECTORS

SECURE OTHER SIDE OF CLIP WITH ONE FINGER AS TAB IS LIFTED AWAY FROM CONNECTOR

CLIP WILL SNAP OFF WHEN ROTATED AWAY FROM CONNECTOR ASSEMBLY AS SHOWN BELOW

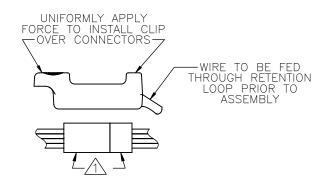

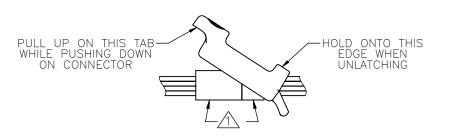

#### NOTES:

WIRED CONNECTORS SOLD SEPARATELY (CONTACT SALES REPRESENTATIVE FOR MORE INFORMATION)

DIMENSIONS IN [ ] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

## LATCHING AND UNLATCHING INSTRUCTIONS

U.S. PATENT 9,088,103

ACTUAL SIZE

CAGE CODE 61873

THIRD ANGLE 🔷 🗗 THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF -TOLERANCES-OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT IN WHOLE OR IN PART BE DUPLICATED. OF DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP UNLESS OTHERWISE NOTED DFTM. ERB 06-20-16 TITLE: DIMENSIONS IN INCHES 2 PL DEC± .01 3 PL DEC± .005 4 PL DEC± .0005 ANGLES ± 1° 11 POSITION CHK'D. NANO CIRCULAR

APP'D.

LATCHING CLIP

# CTOR CORPORATION A79125-011 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432

WWW.OMNÉTICS.COM

SHEET 1 OF 1 REV В SCALE: 2:1