


PART NO.	A79125-016	REV	ECO	DATE	APP
		B	103735	08-24-17	TLM

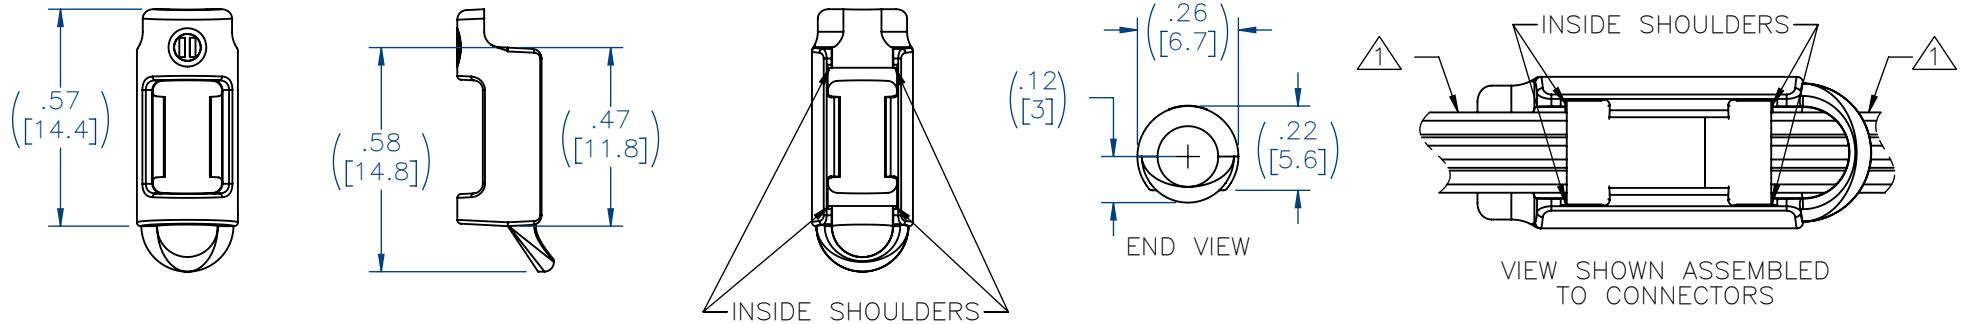

LATCHING:

MAKE SURE CONNECTORS ARE FULLY ENGAGED

SLIP WIRES FROM EITHER END OF CONNECTOR THROUGH RETENTION LOOP ON CLIP AND CENTER THE CLIP OVER THE MATED CONNECTORS

FORCE CLIP EVENLY OVER CONNECTOR ASSEMBLY

ENSURE THE INSIDE SHOULDERS OF THE CLIP COMPLETELY SURROUND THE CONNECTORS AS SHOWN ABOVE


ENSURE CLIP CANNOT SLIDE AXIALLY ALONG THE CONNECTORS AND CONNECTORS ARE HELD IN PLACE BY THE INSIDE SHOULDERS OF THE CLIP

UNLATCHING:

PROTRUDING TAB ON ONE END OF CLIP IS USED TO LEVERAGE THE CLIP OFF OF THE CONNECTORS

SECURE OTHER SIDE OF CLIP WITH ONE FINGER AS TAB IS LIFTED AWAY FROM CONNECTOR

CLIP WILL SNAP OFF WHEN ROTATED AWAY FROM CONNECTOR ASSEMBLY AS SHOWN BELOW

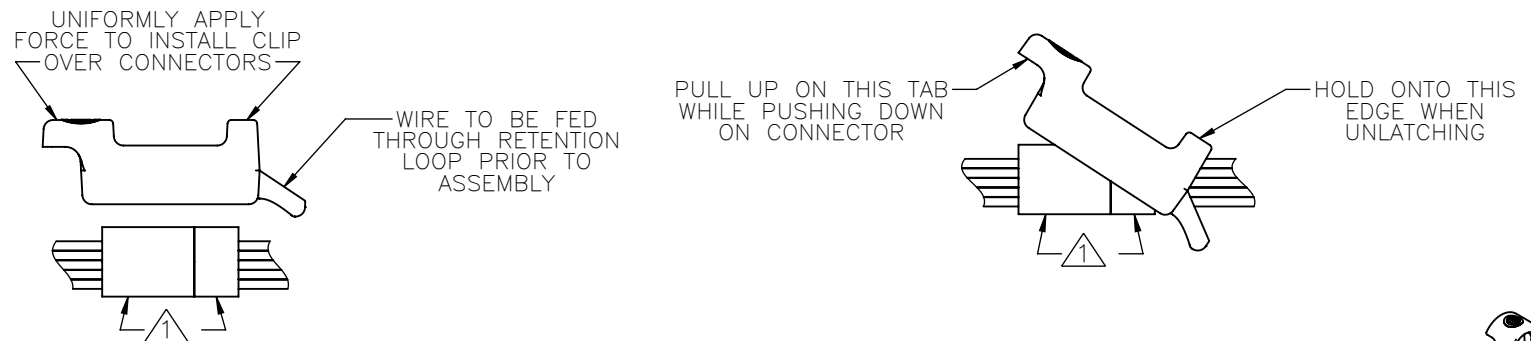

NOTES:

① WIRED CONNECTORS SOLD SEPARATELY (CONTACT SALES REPRESENTATIVE FOR MORE INFORMATION)

DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

LATCHING AND UNLATCHING INSTRUCTIONS

U.S. PATENT 9,088,103

ACTUAL SIZE

SLDW	THIRD ANGLE		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	-TOLERANCES-		DATE			DWG NO.	
	UNLESS OTHERWISE NOTED		06-20-16			A79125-016	
	DIMENSIONS IN INCHES		TITLE:			SHEET 1 OF 1	
	2	PL DEC±.01	DFTM. ERB	DATE		16 POSITION	
	3	PL DEC±.005	CHK'D.	DATE		NANO CIRCULAR	
	4	PL DEC±.0005	APP'D.	DATE		LATCHING CLIP	
ANGLES ± 1°				WWW.OMNETICS.COM			
				SCALE: 2:1			
				REV B			