

PART NO.	A79607-001	REV	ECO	DATE	APP
		D	99309	02-18-13	TLM

THERMOPLASTIC PER ASTM
D5138

PINS - BERYLLIUM
COPPER PER ASTM B194,
ALLOY C17200
SOCKET - COPPER ALLOY
PER MIL-DTL-32139




GOLD PLATE PER ASTM
B488, TYPE II (HARD
GOLD), CODE C, CLASS
1.27

SOLDER COATED WITH
SN63 PER J-STD-006 OR
SN60 PER AMS-P-81728

1 AMP PER MIL-DTL-
32139

71 MILLIOHM MAX (71mV
DROP MAX) @ 1.0 AMPS
PER MIL-DTL-32139

PRODUCT FAMILY TESTED
TO AND PASSED THE
PERFORMANCE
SPECIFICATIONS OF TABLE
VIII OF MIL-DTL-32139

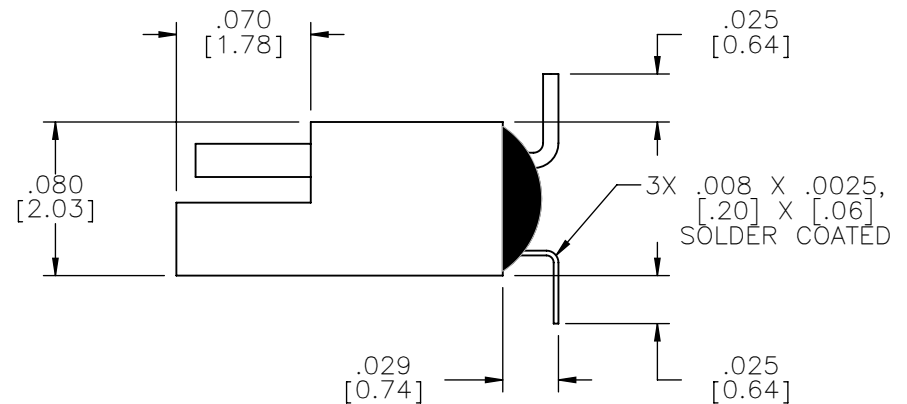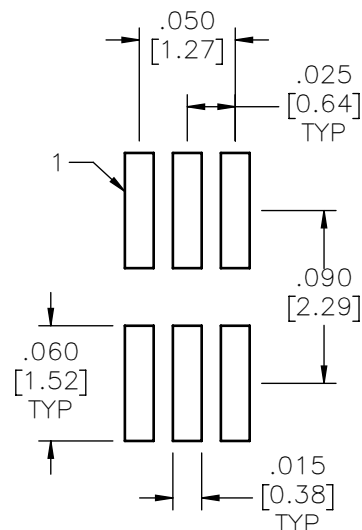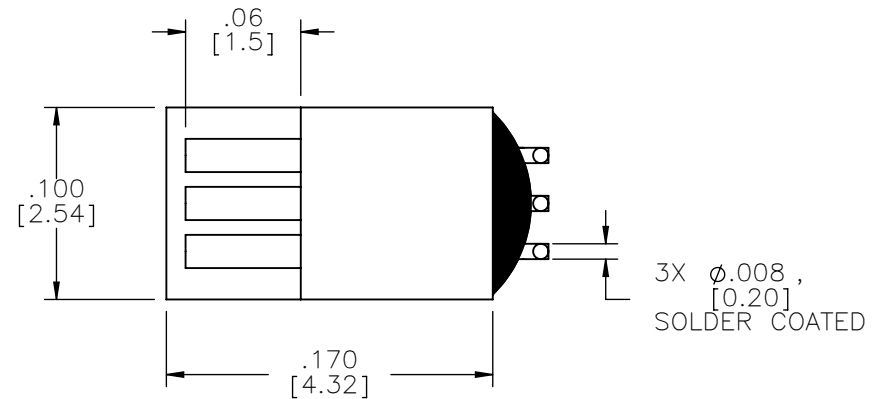

NOTE:

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

PZN	THIRD ANGLE		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.			OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	—TOLERANCES—						DWG NO.	
	UNLESS OTHERWISE NOTED						A79607-001	
	DIMENSIONS IN INCHES						SHEET 1 OF 1	
	2 PL DEC±.01		DFTM. NJS	DATE	TITLE:		REV	
SLDW	3 PL DEC±.005		CHK'D.	DATE	(6) CONTACT POLARIZED		D	
	4 PL DEC±.0005		APP'D.	DATE	MALE/FEMALE			
	ANGLES ±1°				NANO CONNECTOR		SCALE: 10:1	

OMNETICS
CONNECTOR CORPORATION
7260 COMMERCE CIRCLE EAST
MINNEAPOLIS, MN 55432
WWW.OMNETICS.COM