


PART NO.	A79619-001	REV	ECO	DATE	APP
		E	99546	05-25-13	TLM

Technical drawing of a rectangular plate with two columns of holes. The left column contains 5 holes with cross-sections, and the right column contains 5 plain holes. Dimensions include hole diameter .020 [0.50], hole spacing .100 [2.54], plate width .040 [1.02], and hole offset .025 [0.64]. Callouts 1, 2, 9, and 10 point to specific features.

Technical drawing of a component with the following dimensions and features:

- Overall width: .170 [4.32]
- Overall height: .150 [3.81]
- Top edge thickness: .06 [1.5]
- Five horizontal slots on the left side.
- Five horizontal slots on the right side.
- Note: 5X $\phi .008$, [0.20] SOLDER COATED

PERFORMANCE
PRODUCT FAMILY TESTED
TO AND PASSED THE
PERFORMANCE
SPECIFICATIONS OF TABLE
VIII OF MIL-DTL-32139

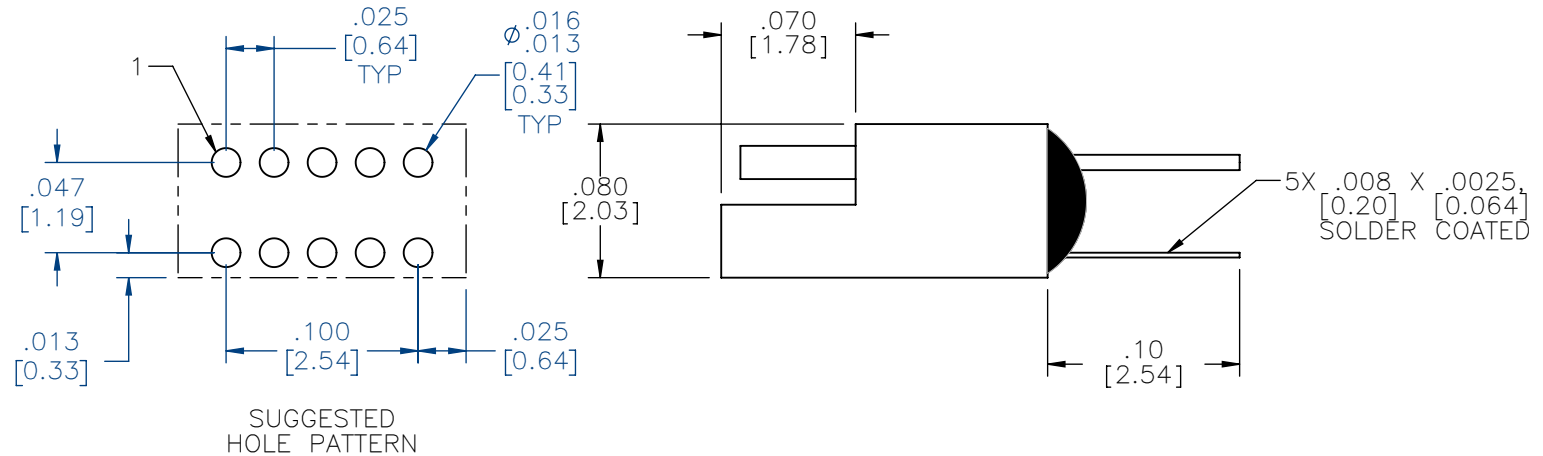

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

PZN	THIRD ANGLE		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.				OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	—TOLERANCES—							DWG NO.	
	UNLESS OTHERWISE NOTED							A79619-001	
	DIMENSIONS IN INCHES							SHEET 1 OF 1	
2	PL DEC	± .01	DFTM. NJS	DATE	08-24-09		TITLE: (10) CONTACT POLARIZED MALE/FEMALE NANO CONNECTOR	REV	
3	PL DEC	± .005	CHK'D.	DATE				E	
4	PL DEC	± .0005	APP'D.	DATE				SCALE: 10:1	
SLDW	ANGLES	± 1°							