


PART NO.	A79652-001	REV	ECO	DATE	APP
06		B	101562	05-08-15	TLM

Technical drawing of a component with the following dimensions:

- Top width: .06 [1.5]
- Left height: .325 [8.26]
- Bottom width: .170 [4.32]
- Right side: 12X ϕ .008, [0.20] SOLDER COATED

B	101562	05-08-13

PERFORMANCE
PRODUCT FAMILY TESTED TO
AND PASSED THE
PERFORMANCE
SPECIFICATIONS OF TABLE
VIII OF MIL-DTL-32139

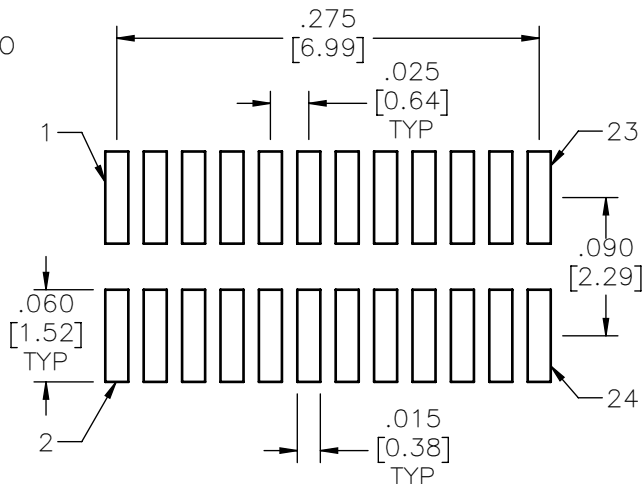

.070
 [1.78]

.025
 [0.64]

.080
 [2.03]

12X .008 X .0025
 [0.20] X [0.064]
 SOLDER COATED

.025
 [0.64]

.029
 [0.74]

DATECODE MARKING
 "YYWW" THIS SIDE

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

PZN	THIRD ANGLE	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		OMNETICS CONNECTOR CORPORATION 7260 CONNEAPOR CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	—TOLERANCES—	TITLE:			DWG NO.	REV
	UNLESS OTHERWISE NOTED	(24) CONTACT POLARIZED			A79652-001	
	DIMENSIONS IN INCHES	MALE/FEMALE				
2	PL DEC ± .01	DFTM. JMJ	DATE 04-12-13		SHEET 1 OF 1	B
3	PL DEC ± .005	CHK'D.	DATE		SCALE: 8:1	
4	PL DEC ± .0005	APP'D.	DATE	NANO CONNECTOR		
SLDW	ANGLES ± 1°					