


SPECIAL INSTRUCTIONS: NO	PART NO.	A97011-025	REV	ECO	DATE	APP
			B	111496	03-17-25	BAS

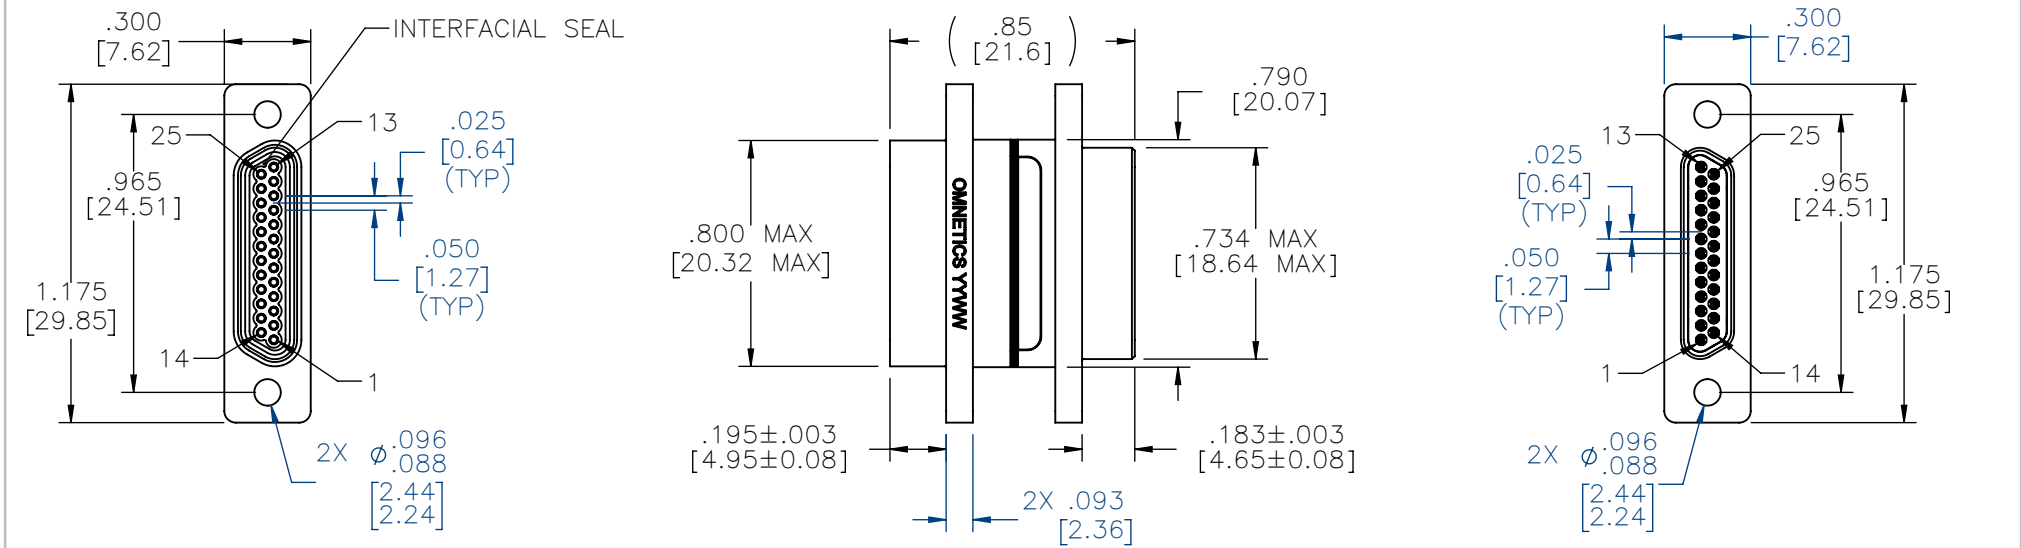

MATERIALS



HOUSING:
ALUMINUM 6061, NICKEL PLATE
(500 MICROINCHES MINIMUM) PER
SAE-AMS-2404

INSULATOR:
LIQUID CRYSTAL POLYMER (LCP)
PER ASTM D5138

MALE CONTACT:
BERYLLIUM COPPER PER ASTM
B194, C17200, GOLD PLATED PER
ASTM B488, (HARD GOLD) TYPE II
CODE C, CLASS 1.27

FEMALE CONTACT/SOLDERCUP:
COPPER ALLOY PER MIL-DTL-
83513, GOLD PLATED PER ASTM
B488, (HARD GOLD) TYPE II CODE
C CLASS 1.27

INTERFACIAL SEAL:
SILICONE RUBBER PER A-A-59588

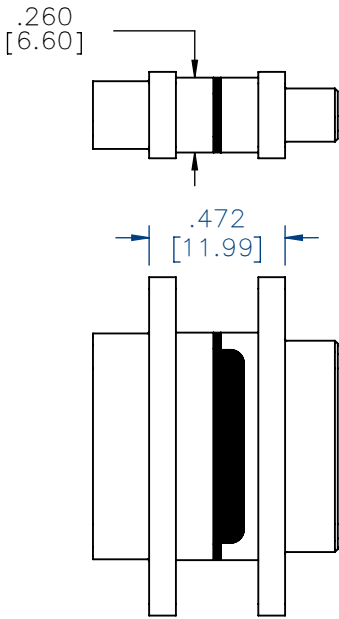

ACTUAL SIZE

NOTES:
1. DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY.

MMDZ SLDW	THIRD ANGLE 		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.	
	-TOLERANCES-			
	UNLESS OTHERWISE NOTED			
	DIMENSIONS IN INCHES			
	2	PL DEC $\pm$.01	TITLE: (25) POSITION MICRO-D CONNECTOR SAVER - -	
	3	PL DEC $\pm$.005		
	4	PL DEC $\pm$.0005		
	ANGLES $\pm$ 1°			
			DFTM. JMJ	
			DATE 12-18-12	



CONNECTOR CORPORATION

8840 EVERGREEN BLVD.
MINNEAPOLIS, MN 55433
WWW.OMNETICS.COM

DWG NO.	CAGE CODE	61873
A97011-025		
SHEET 1 OF 1	SCALE: 3:2	REV B