
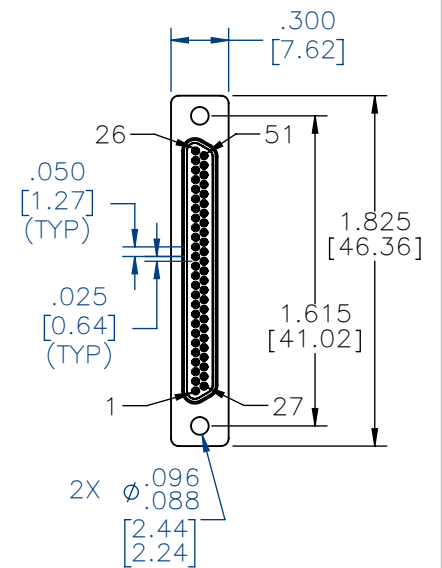
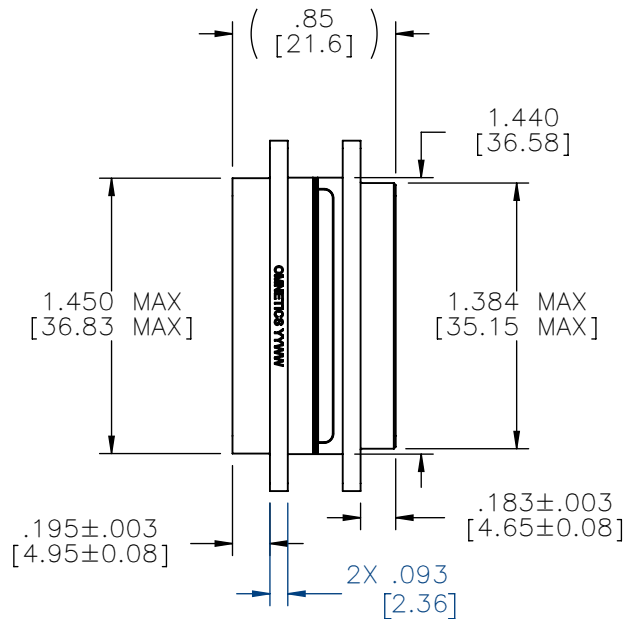


SPECIAL INSTRUCTIONS: NO	PART NO.	A97011-512	REV	ECO	DATE	APP
			B	111496	03-17-25	BAS

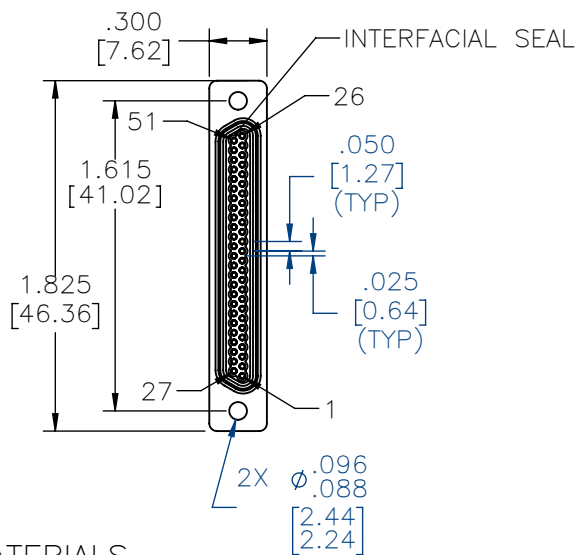

MATERIALS




HOUSING:
ALUMINUM 6061, NICKEL PLATE
(500 MICROINCHES MINIMUM) PER
SAE-AMS-2404

INSULATOR:
LIQUID CRYSTAL POLYMER (LCP)
PER ASTM D5138

MALE CONTACT:
BERYLLIUM COPPER PER ASTM
B194, C17200, GOLD PLATED PER
ASTM B488, (HARD GOLD) TYPE II
CODE C, CLASS 1.27

FEMALE CONTACT/SOLDERCUP:
COPPER ALLOY PER MIL-DTL-
83513, GOLD PLATED PER ASTM
B488, (HARD GOLD) TYPE II CODE
C CLASS 1.27

INTERFACIAL SEAL:
SILICONE RUBBER PER A-A-59588

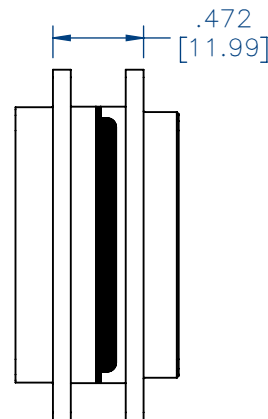

ACTUAL SIZE

NOTES:

- DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY.

MMDZ	THIRD ANGLE	
	-TOLERANCES-	
SLDW	UNLESS OTHERWISE NOTED	
	DIMENSIONS IN INCHES	
	2 PL DEC±	.01
	3 PL DEC±	.005
	4 PL DEC±	.0005
	ANGLES ±	1°

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.

TITLE:	(51) POSITION MICRO-D
DFTM. JMJ	CONNECTOR SAVER
DATE	-
08-23-13	

OMNETICS
CONNECTOR CORPORATION
8840 EVERGREEN BLVD.
MINNEAPOLIS, MN 55433
WWW.OMNETICS.COM

DWG NO.	CAGE CODE	61873
		A97011-512
SHEET	SCALE: 1:1	REV B
1 OF 1		