


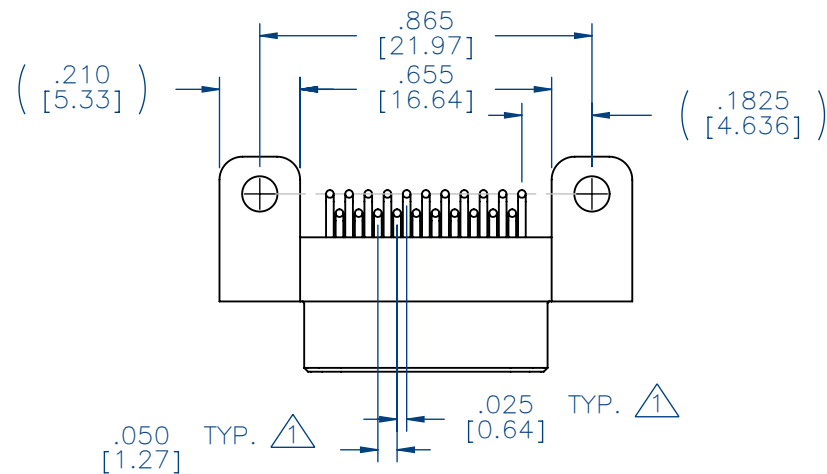


PART NO.	A98055-021	REV	ECO	DATE	APP
		B	101956	09-29-15	TLM

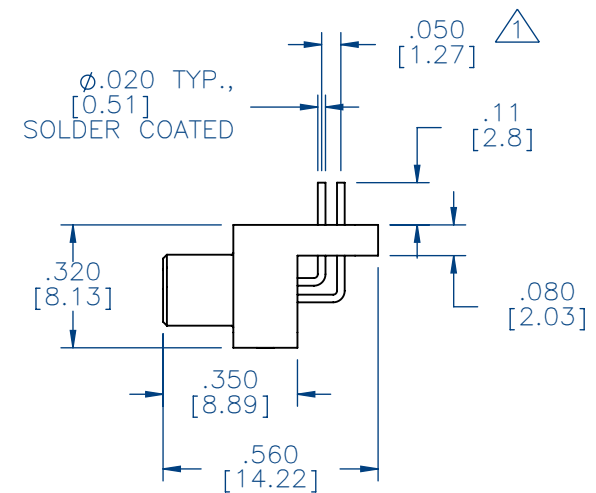

ACTUAL SIZE

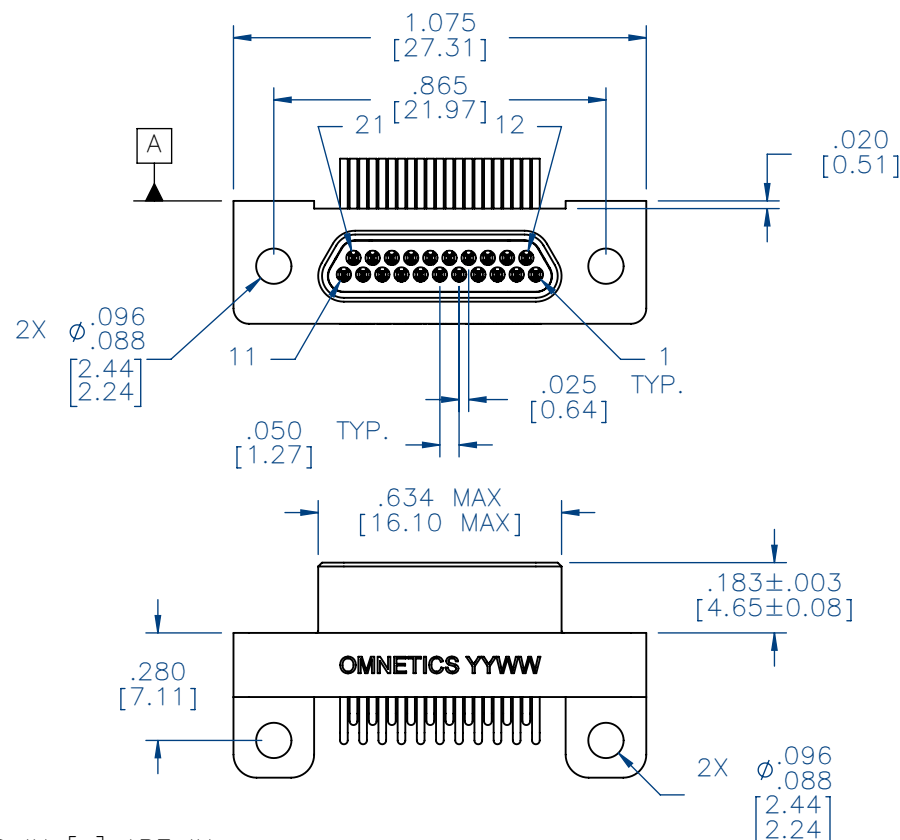

NOTE:

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY


1 TAIL DIMENSIONS APPLY
AT PLANE A

MMPD SLDW	THIRD ANGLE -TOLERANCES- UNLESS OTHERWISE NOTED DIMENSIONS IN INCHES 2 PL DEC. ± .01 3 PL DEC. ± .005 4 PL DEC. ± .0005 ANGLES ± 1° THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP. CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM CAGE CODE 61873 DWG NO. A98055-021 SHEET 1 OF 2 REV B SCALE: 2:1
	DFTM. TLM DATE 05-06-14 TITLE: (21) PIN MALE 90° BOARD MOUNT MICRO-D CONNECTOR
	CHK'D. DATE
	APP'D. DATE

PART NO.	A98055-021	REV	ECO	DATE	APP
		B	101956	09-29-15	TLM

MATERIALS

- HOUSING:
- ALUMINUM 6061-T6, NICKEL
PLATE PER SAE-AMS-2404
- INSULATOR:
- LIQUID CRYSTAL POLYMER (LCP)
PER ASTM D5138
- CONTACT:
- BERYLLIUM COPPER PER ASTM
B194, C17200, GOLD PLATED
PER ASTM B488, (HARD GOLD)
TYPE II CODE C, CLASS 1.27
- TERMINATION:
- SOLDER COATED WITH SN63A
PER J-STD-006 OR AMS-P-
81728

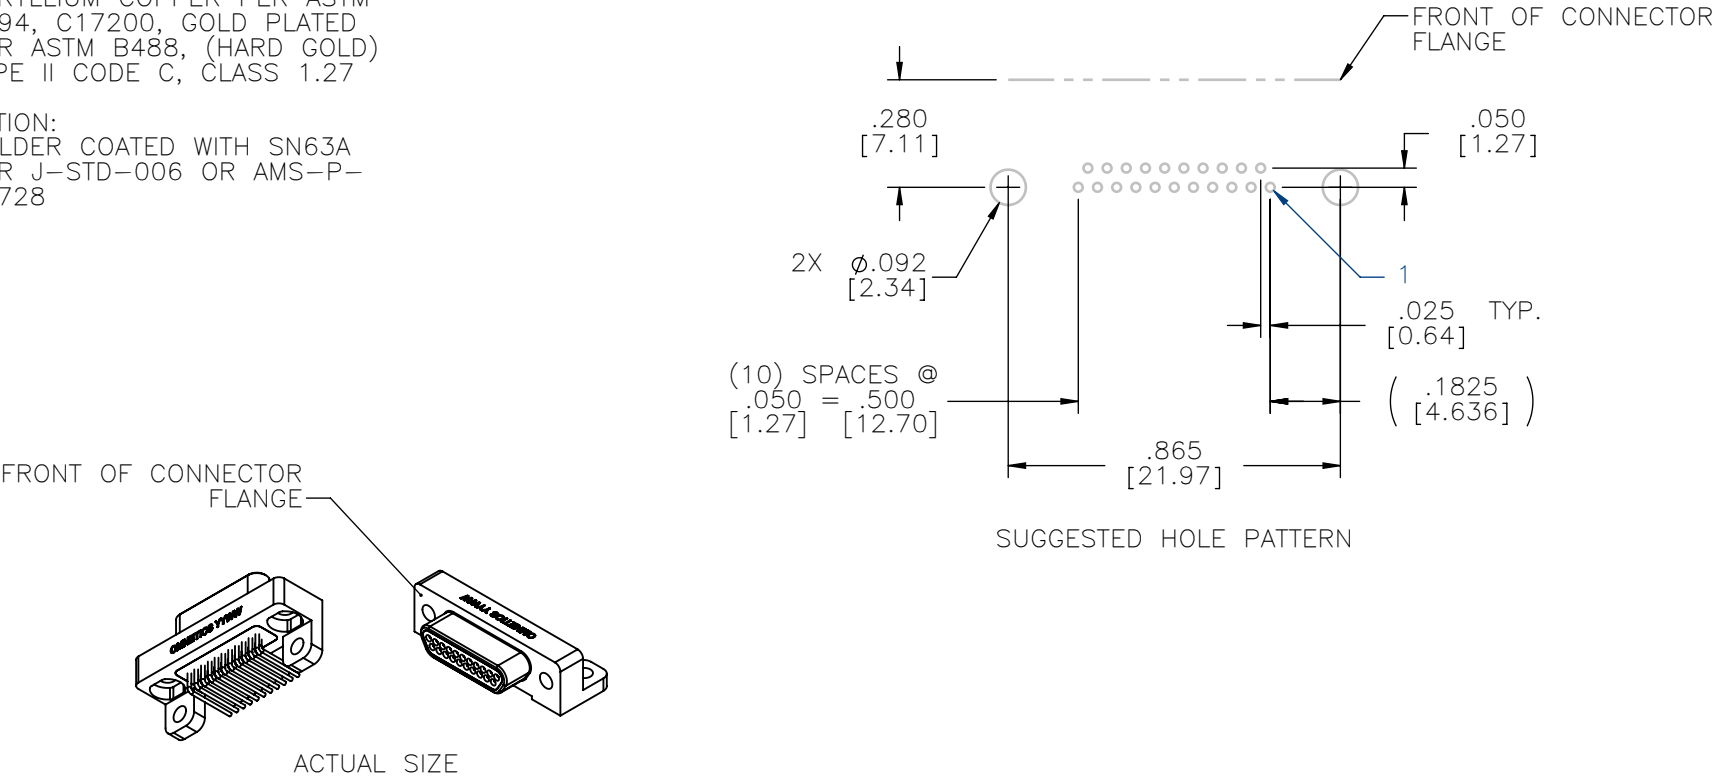

NOTE:

DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

MMDP SLDW	THIRD ANGLE 		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.				 CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	—TOLERANCES— UNLESS OTHERWISE NOTED		DFTM. TLM	DATE 05—06—14	TITLE: (21) PIN MALE 90° BOARD MOUNT MICRO-D CONNECTOR	DWG NO. A98055—021			
	DIMENSIONS IN INCHES		CHK'D.	DATE		SHEET 2 OF 2		REV B	
	2 PL DEC ± .01 3 PL DEC ± .005 4 PL DEC ± .0005 ANGLES ± 1°		APP'D.	DATE					