

PART NO.	A98150-031	REV	ECO	DATE	APP
		C	100387	03-20-14	TLM

ALUMINUM 6061-T6, NICKEL
PLATE PER SAE-AMS-2404

STAINLESS STEEL, NICKEL
PLATE PER SAE-AMS-2404



LIQUID CRYSTAL POLYMER
(LCP) PER ASTM D5138

BERYLLIUM COPPER PER
ASTM B194, C17200, GOLD
PLATED PER ASTM B488,
(HARD GOLD) TYPE II CODE
C, CLASS 1.27



NEMA HP3 TYPE E, COLOR
CODED IAW MIL-STD-681,
SYSTEM 1, USING TEN SOLID
REPEATING COLORS

PIN #	COLOR
1, 11, 21, 31	BLACK
2, 12, 22	BROWN
3, 13, 23	RED
4, 14, 24	ORANGE
5, 15, 25	YELLOW
6, 16, 26	GREEN
7, 17, 27	BLUE
8, 18, 28	VIOLET
9, 19, 29	GRAY
10, 20, 30	WHITE

INTERNAL USE ONLY
USE MFG LOADING
PROCEDURE MMDP-031

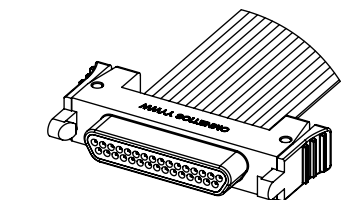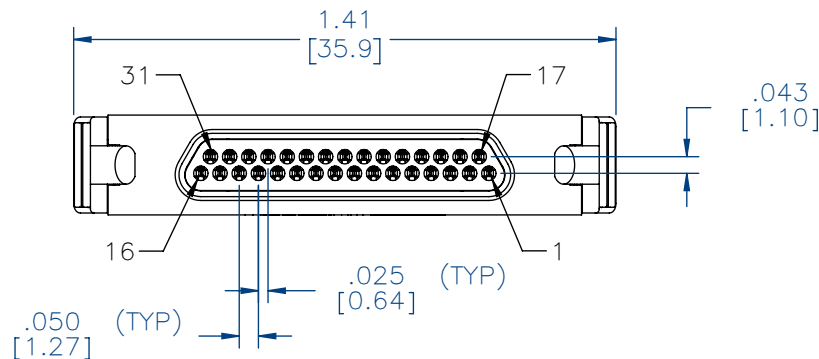

ACTUAL SIZE
EXCLUDING WIRE LENGTH

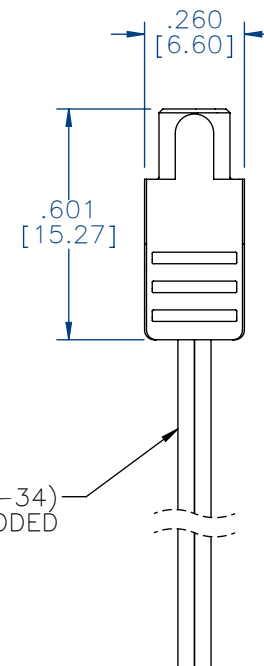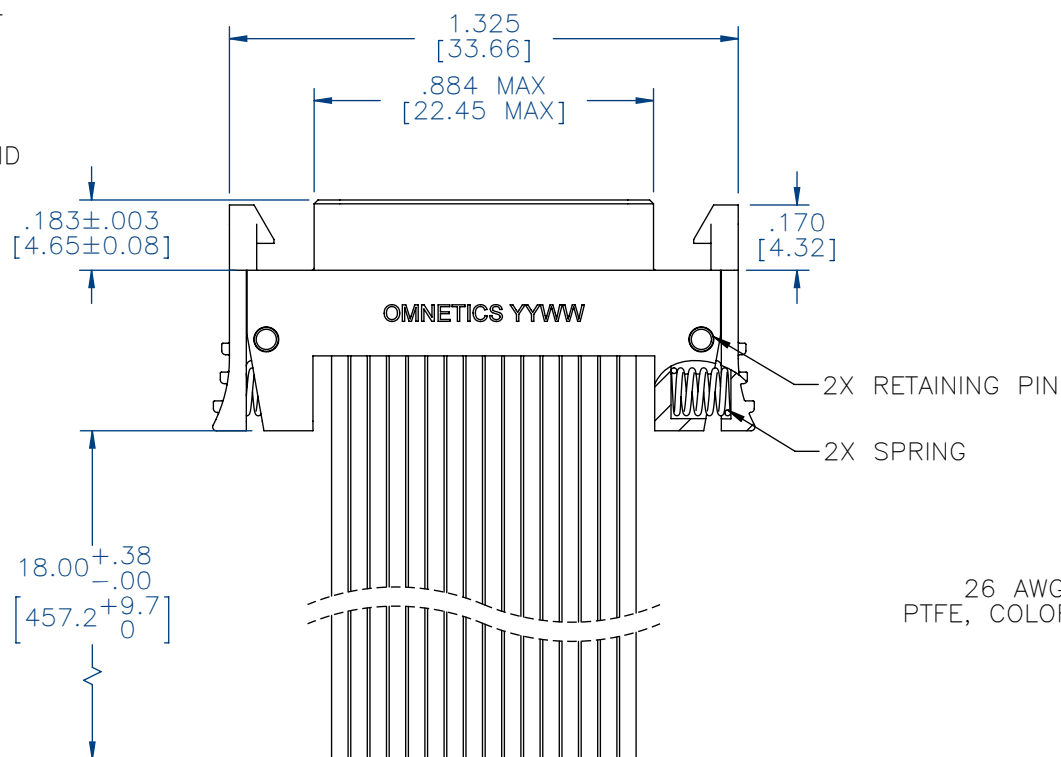

26 AWG (7-34)
PTFE, COLOR CODED

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

LMDP SLDW	THIRD ANGLE		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	-TOLERANCES- UNLESS OTHERWISE NOTED					DWG NO. A98150-031	
	DIMENSIONS IN INCHES		DFTM. MJM DATE 04-09-12			TITLE: (31) PIN MALE MICRO-D CONNECTOR W/LATCHES	
	2 PL DEC ± .01 3 PL DEC ± .005 4 PL DEC ± .0005 ANGLES ± 1°		CHK'D. DATE APP'D. DATE			SHEET 1 OF 1 SCALE: 2:1	
						REV C	

RoHS