

PART NO.	A99000-512	REV	ECO	DATE	APP
		C	104188	01-29-18	HV


ALUMINUM 6061, NICKEL PLATE
(500 MICRONS MINIMUM)
PER SAE-AMS-2404

LIQUID CRYSTAL POLYMER
(LCP) PER ASTM D5138

COPPER ALLOY PER MIL-DTL-83513, GOLD PLATED PER ASTM B488, (HARD GOLD)
TYPE II CODE C CLASS 1.27

SILICONE RUBBER PER A-A-59588

AVAILABLE UPON REQUEST

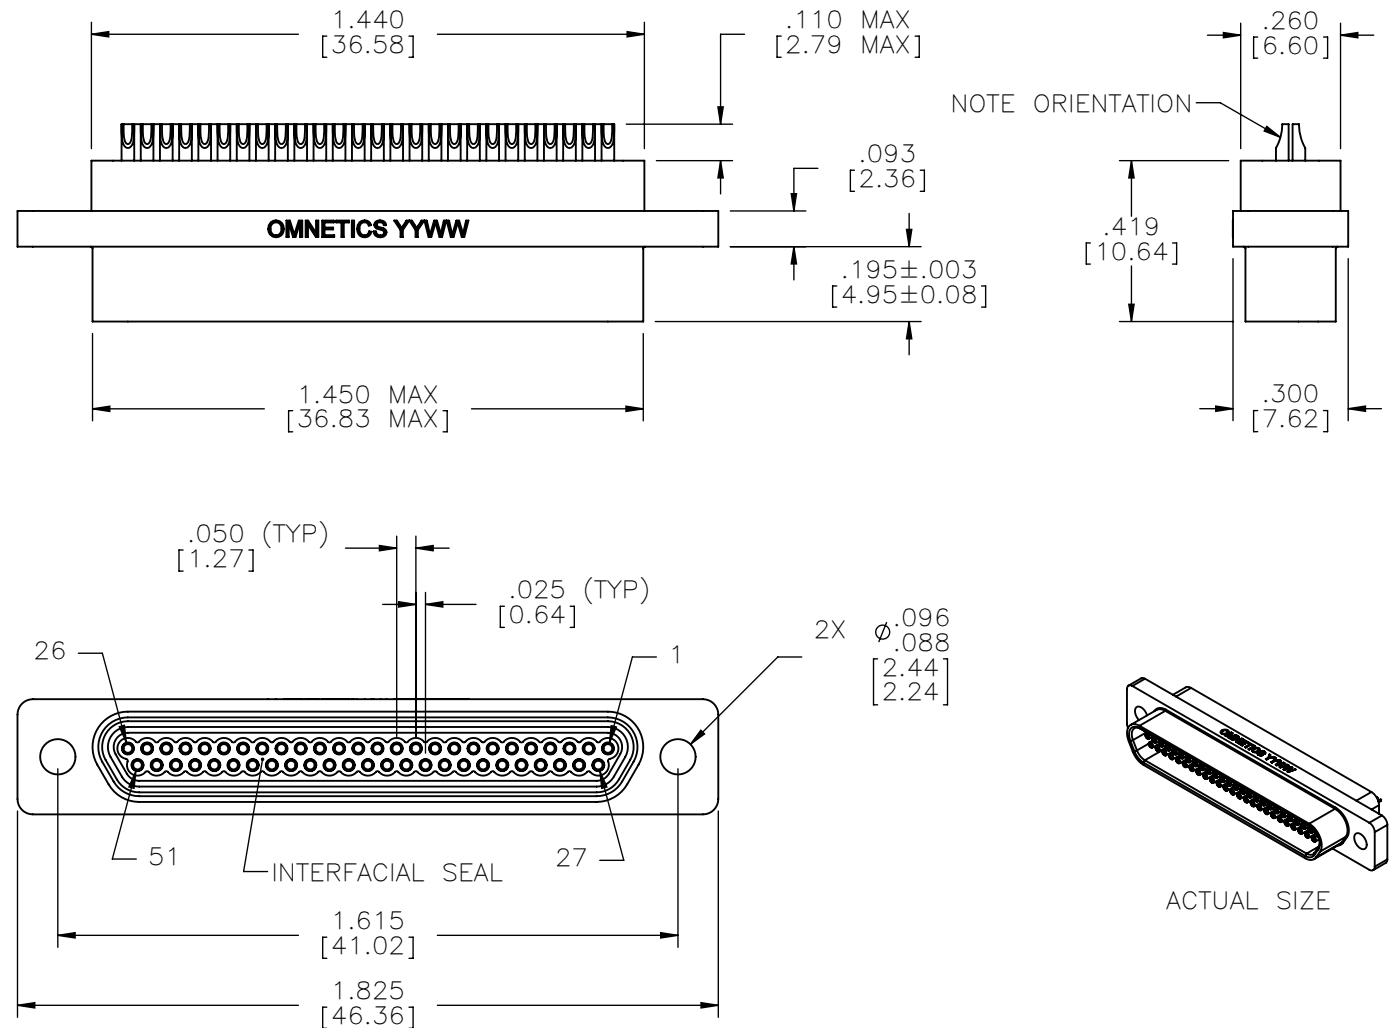

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

MMSD SLDW	THIRD ANGLE	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		 OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	—TOLERANCES—				DWG NO. A99000-512	
	UNLESS OTHERWISE NOTED				SHEET 1 OF 1	
	DIMENSIONS IN INCHES				REV C	
2 PL DEC ± .01	DFTM. DGJ	DATE 07-27-11	TITLE: (51) SOCKET FEMALE MICRO-D CONNECTOR -	SCALE: 2:1		
3 PL DEC ± .005	CHK'D.	DATE				
4 PL DEC ± .0005	APP'D.	DATE				
ANGLES ± 1°						

RoHS