

PART NO.	A99279-021	REV	ECO	DATE	APP
		A	102791	08-09-16	HV

ALUMINUM 6061-T6, NICKEL
PLATE PER SAE-AMS-2404

LIQUID CRYSTAL POLYMER
(LCP) PER ASTM D5138

COPPER ALLOY PER MIL-DTL-
83513, GOLD PLATED PER
ASTM B488, (HARD GOLD)
TYPE II CODE C CLASS 1.27

NEMA HP3 TYPE E, COLOR
CODED IAW MIL-STD-681,
SYSTEM 1, USING TEN SOLID
REPEATING COLORS


SILICONE RUBBER PER A-A-59588

STAINLESS STEEL, PASSIVATED
PER SAE-AMS-2700

SOCKET #	COLOR
1, 11, 21	BLACK
2, 12	BROWN
3, 13	RED
4, 14	ORANGE
5, 15	YELLOW
6, 16	GREEN
7, 17	BLUE
8, 18	VIOLET
9, 19	GRAY
10, 20	WHITE

INTERNAL USE ONLY
USE MFG LOADING
PROCEDURE MMDS-021

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

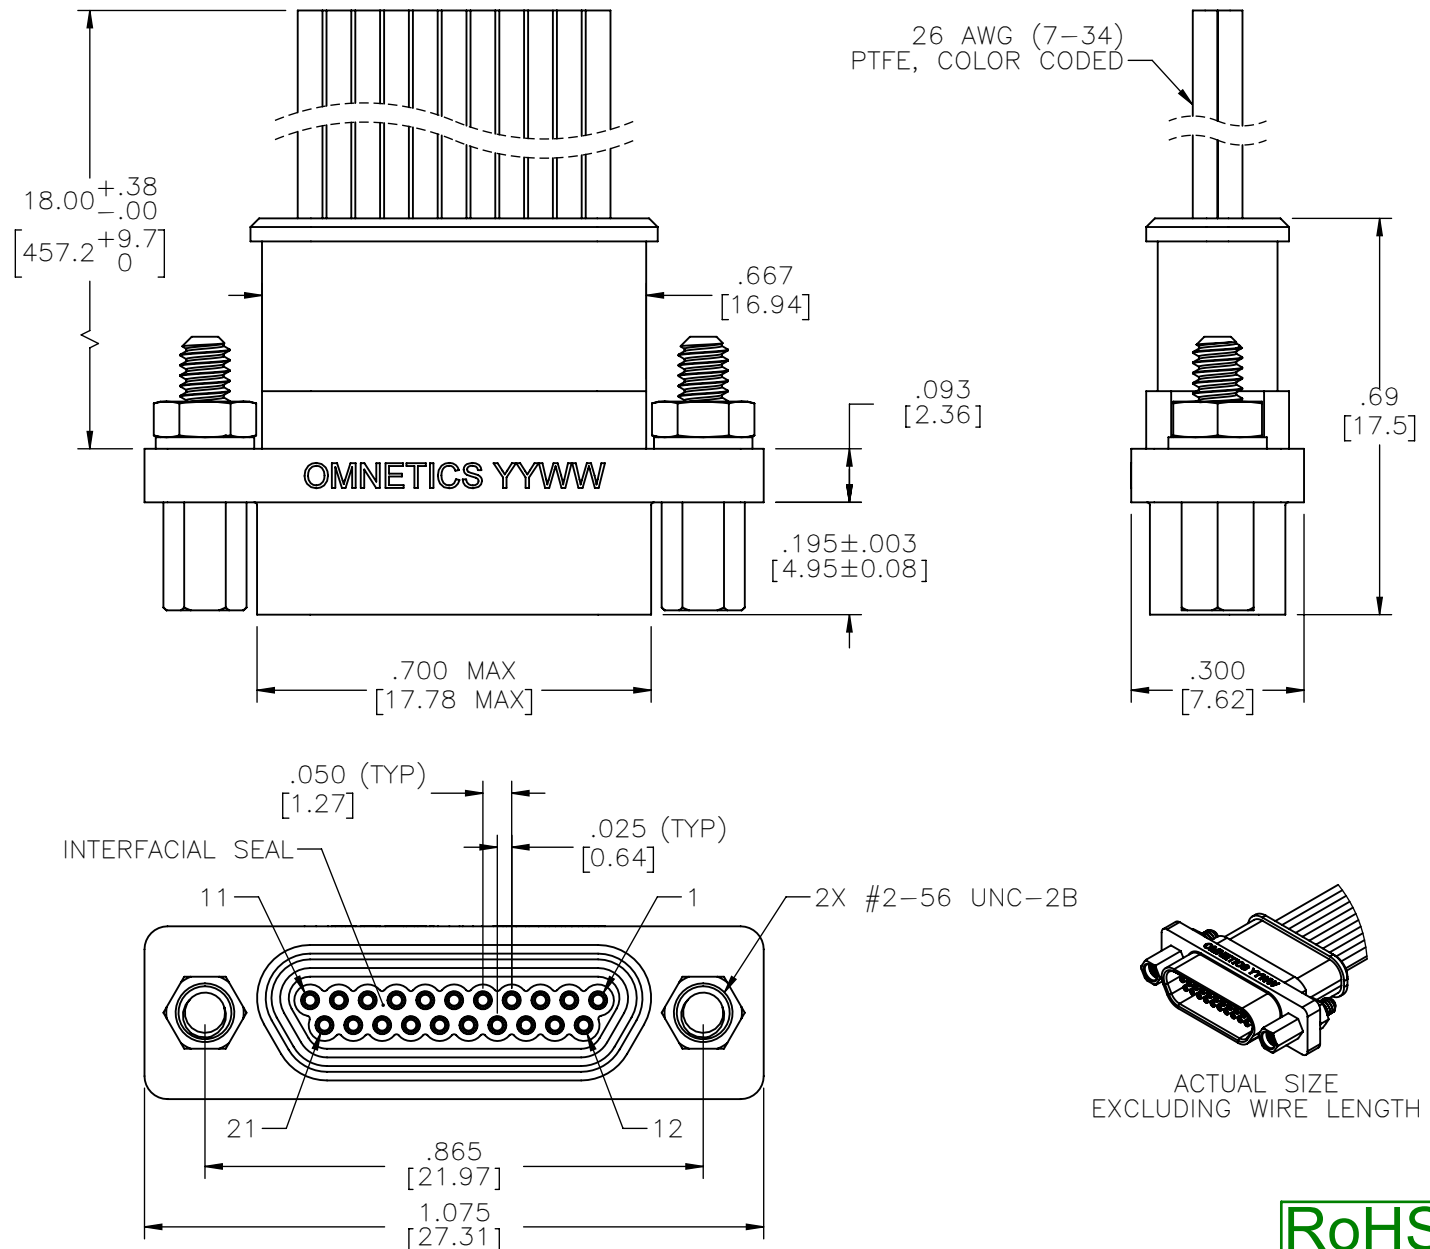

ACTUAL SIZE
EXCLUDING WIRE LENGTH

RoHS

NOTE:

MMSD SLDW	THIRD ANGLE		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		 OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	-TOLERANCES- UNLESS OTHERWISE NOTED					DWG NO. A99279-021	
	DIMENSIONS IN INCHES		DFTM. HV DATE 05-31-16			TITLE: (21) SOCKET FEMALE	
	2 PL DEC ± .01 3 PL DEC ± .005 4 PL DEC ± .0005 ANGLES ± 1°		CHK'D. DATE			MICRO-D CONNECTOR	
			APP'D. DATE			W/ JACKPOSTS	
						SCALE: 3:1	
						REV A	