
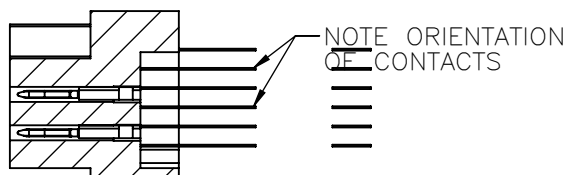
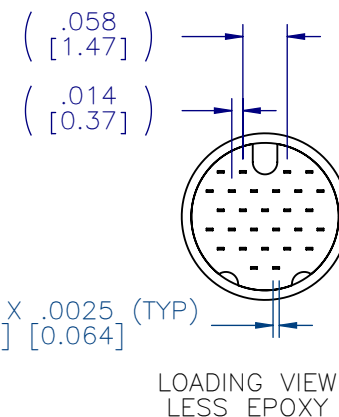
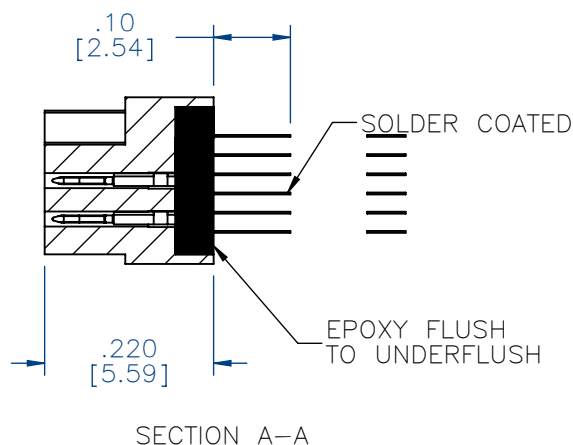
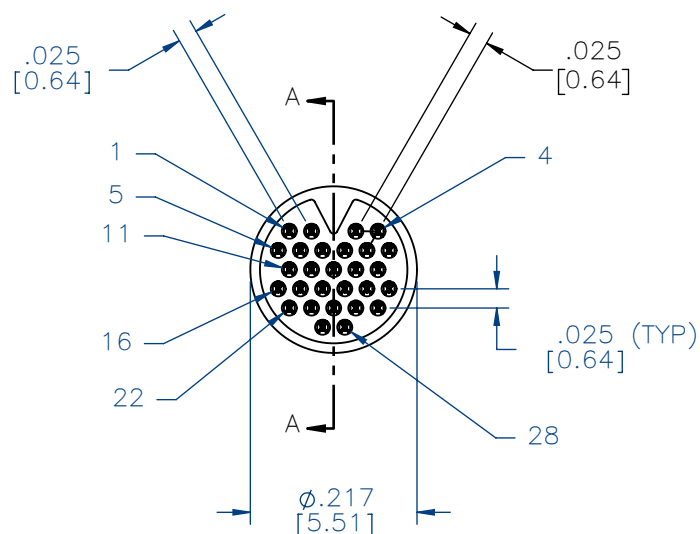


PART NO.	A79114-001	REV	ECO	DATE	APP
		E	99287	02-19-13	TLM

CONTACT RESISTANCE:
71 MILLIOHMS (71 mV) MAX @ 1.0 AMPS PER MIL-DTL-32139

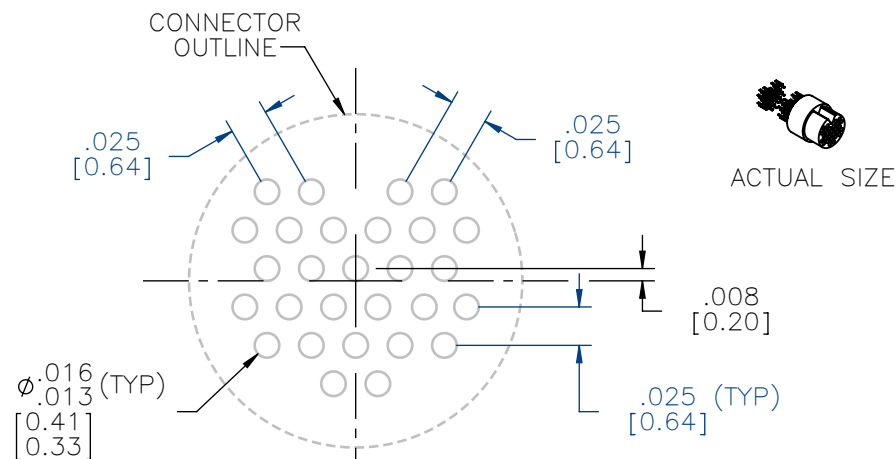

VIEW
LESS EPOXY

NCP	THIRD ANGLE	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.			 OMNETICS CONNECTOR CORPORATION 7260 COMMEARPE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	—TOLERANCES—	DFTM. ACM DATE 01-22-09 TITLE: (28) PIN MALE NANO CIRCULAR CONNECTOR CHK'D. DATE APP'D. DATE				DWG NO. A79114-001	
	UNLESS OTHERWISE NOTED					SHEET 1 OF 1 REV E	
	DIMENSIONS IN INCHES					SCALE: 4:1	
SLDW	2 PL DEC ± .01 3 PL DEC ± .005 4 PL DEC ± .0005 ANGLES ± 1°						