


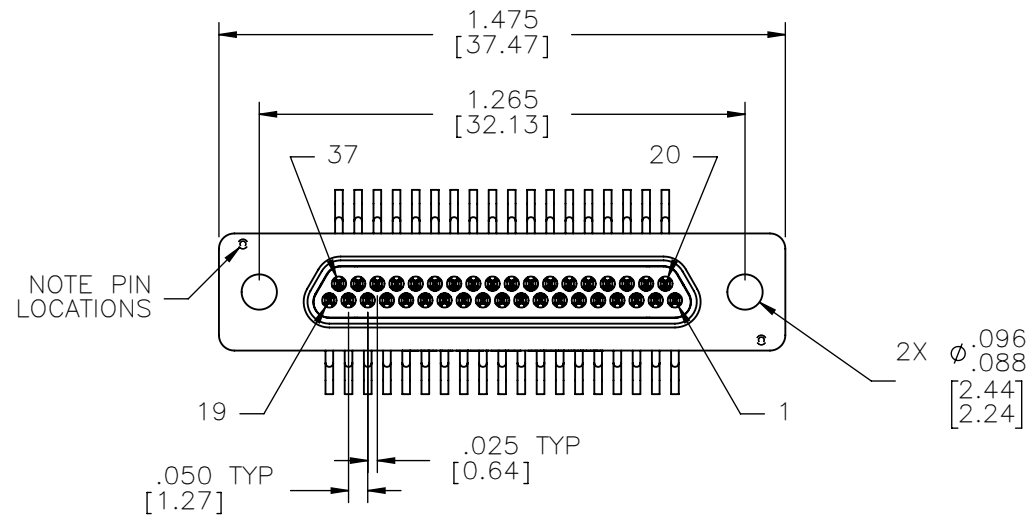


PART NO.	A98002-037	REV	ECO	DATE	APP
		A	101420	03-24-15	TLM

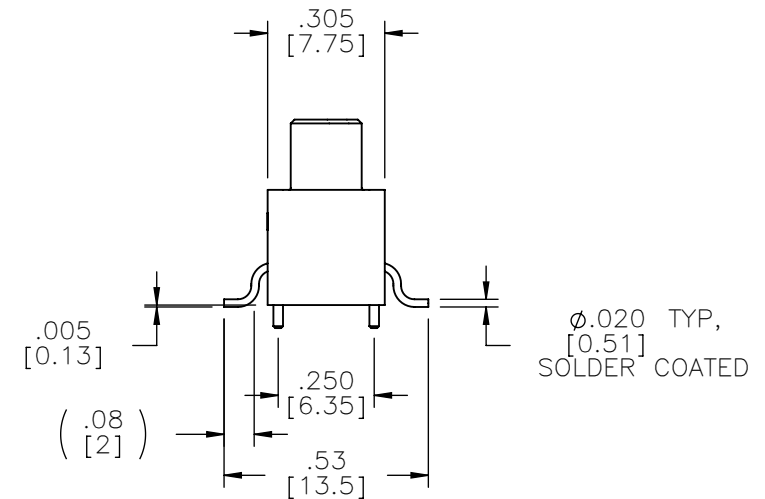

ACTUAL SIZE

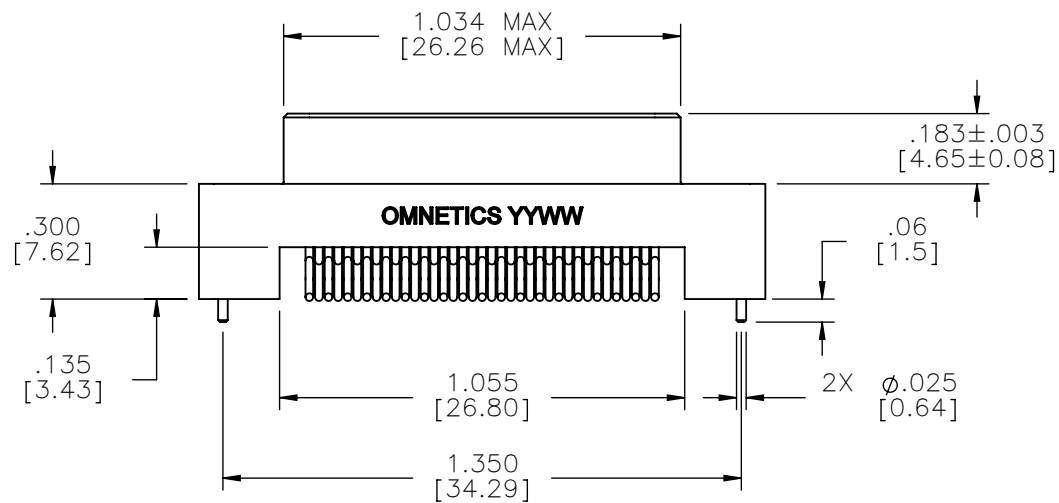

NOTE:



DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

MMDP SLDW	THIRD ANGLE		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.		OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	—TOLERANCES— UNLESS OTHERWISE NOTED					DWG NO. A98002-037	
	DIMENSIONS IN INCHES		DFTM. TLM DATE 03-20-15			TITLE: (37) PIN MALE VERTICAL SURFACE MOUNT MICRO-D	
	2 PL DEC. ± .01 3 PL DEC. ± .005 4 PL DEC. ± .0005 ANGLES ± 1°		CHK'D. DATE APP'D. DATE				
						SHEET 1 OF 2 SCALE: 2:1	
						REV A	

PART NO.	A98002-037	REV	ECO	DATE	APP
		A	101420	03-24-15	TLM

MATERIALS

- HOUSING:
ALUMINUM 6061-T6, NICKEL
PLATE PER SAE-AMS-2404
- INSULATOR:
LIQUID CRYSTAL POLYMER (LCP)
PER ASTM D5138
- CONTACT:
BERYLLIUM COPPER PER ASTM
B194, C17200, GOLD PLATED
PER ASTM B488, (HARD GOLD)
TYPE II CODE C, CLASS 1.27
- TERMINATION:
SOLDER COATED WITH SN63A
PER J-STD-006 OR AMS-P-
81728

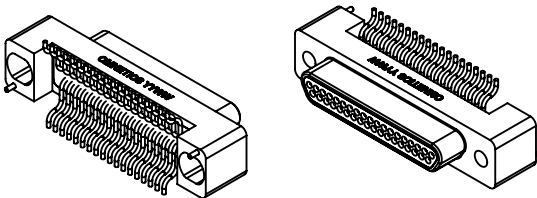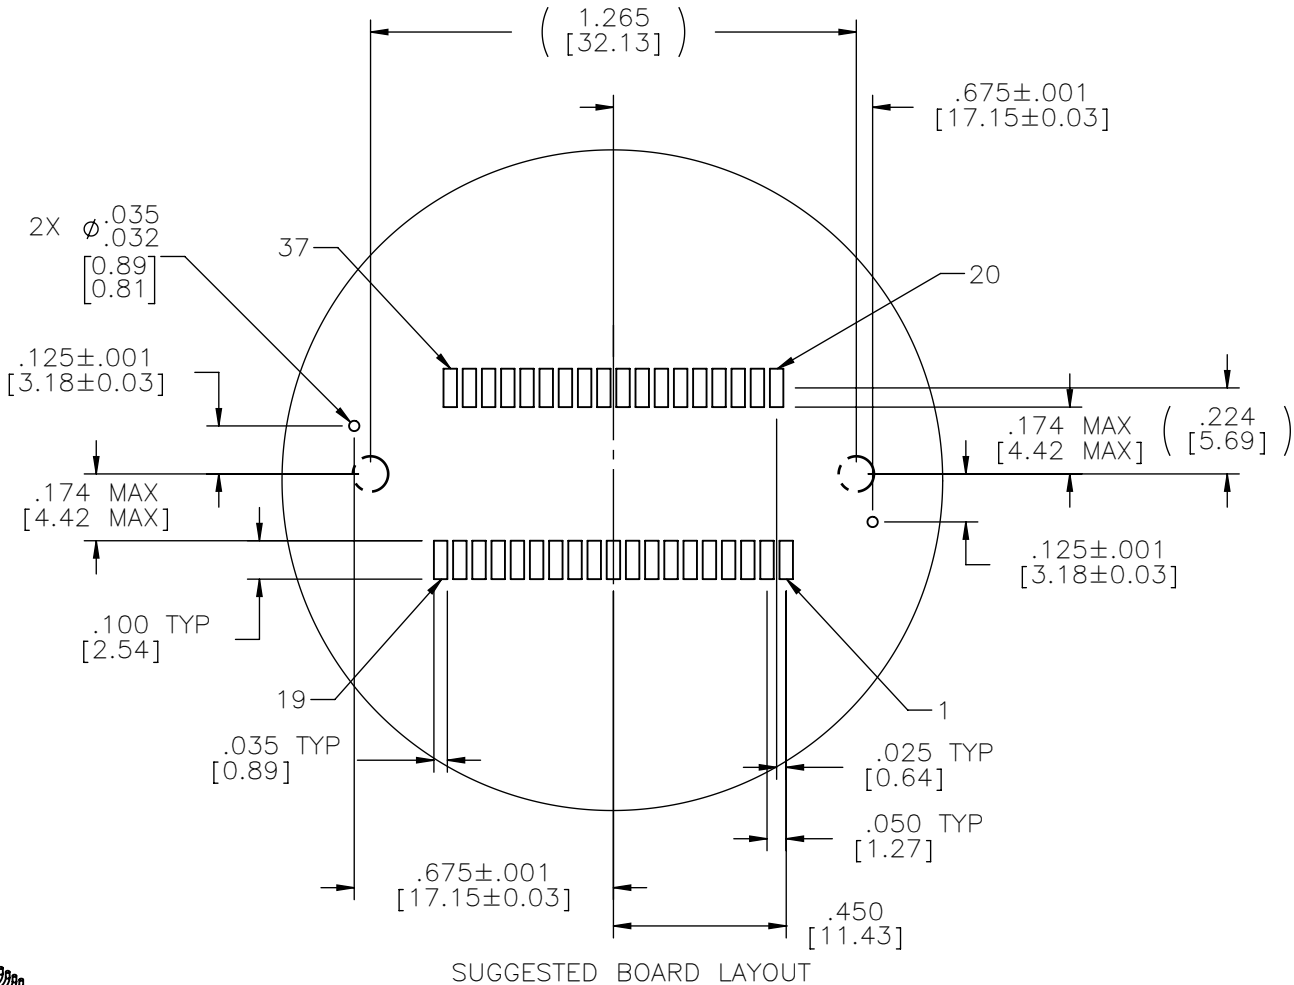

ACTUAL SIZE

NOTE:

DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

MMDP SLDW	THIRD ANGLE 		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.				 OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	-TOLERANCES-							DWG NO.	
	UNLESS OTHERWISE NOTED		A98002-037		SHEET 2 OF 2	REV A			
	DIMENSIONS IN INCHES		SCALE: 2:1						
	2 PL DEC ± .01	DFTM. TLM	DATE 03-20-15	TITLE: (37) PIN MALE VERTICAL SURFACE MOUNT MICRO-D					
	3 PL DEC ± .005	CHK'D.	DATE						
	4 PL DEC ± .0005								
	ANGLES ± 1°	APP'D.	DATE						